


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

WELL PLUGGING RECORD

NORTH



Locate well correctly on above  
Section Plat

Stafford County. Sec. 35 Twp. 24 Rge. (E) 15 (W)  
Location as "NE/CNW%SW%" or footage from lines NE SE SE  
Lease Owner Arnell Company  
Lease Name Giles Well No. 1  
Office Address 533 Petroleum Building, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed June 17, 19 59  
Application for plugging filed June 17, 19 59  
Application for plugging approved June 17, 19 59  
Plugging commenced June 17, 19 59  
Plugging completed June 17, 19 59  
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production -- 19 --  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Frank Broadfoot  
Producing formation -- Depth to top -- Bottom -- Total Depth of Well 4467 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	306'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from -- feet to -- feet for each plug set.

Filled hole from total depth, 4467, to 306' with mud. Cement plug 306' to 240' with 20 sx cement. Mud from 240' to 65'. Cement plug 65' to 40' with 8 sx cement. Heavy rotary mud from 40' to cellar.

RECEIVED  
STATE CORPORATION COMMISSION  
6-22-59  
JUL 22 1959  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor National Drilling Company, Inc.  
Address 535 Petroleum Building, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
Walter W. Clements, Jr. (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Walter W. Clements, Jr.  
533 Petroleum Building, Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 21st day of July, 19 59

Ruby Gourley  
Notary Public.

My commission expires \_\_\_\_\_

RUBY GOURLEY  
My commission expires July 13, 1960

PLUGGING  
FILE SEC 251.24 R 154  
BOOK PAGE 53 LINE 8

DRILLERS LOG

Giles #1

CASING RECORD: 8 5/8" @ 306'  
w/200 sx Sunset

COMPANY: ARTNELL COMPANY

CONTRACTOR: National Drilling Company, Inc.

COMMENCED: June 2, 1959

COMPLETED: June 17, 1959

DESCRIPTION: NE SE SE  
35-24S-15W  
Stafford County  
Kansas

ELEVATION: 2012 KB  
2010 DF

TOTAL DEPTH: 4467 (-2455)

---


<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Sand	0	110	
Shale & Shells	110	310	
Shale & Redbed	310	660	
Shale & Shells	660	1765	
Shale & Lime	1765	2190	
Lime & Shale	2190	2390	
Shale	2390	2450	
Lime & Shale	2450	2570	
Shale & Lime	2570	3355	
Lime & Shale	3355	3475	
Lime	3475	3605	
Lime & Shale	3605	3774	
Lime	3774	4328	
Chert (solid)	4328	4360	
Lime	4360	4467	

---

RECEIVED  
STATE CORPORATION COMMISSION  
JUL 22 1959  
CONSERVATION DIVISION  
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

NATIONAL DRILLING COMPANY, INC.

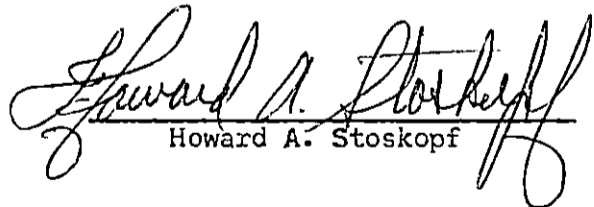  
Howard A. Stoskopf

Subscribed and sworn to before me this 16th day of July, 1959.

  
Notary Public

RUBY GOURLEY  
My commission expires July 13, 1960

PLUGGING  
FILE SEC 35 T.24 R.15W  
BOOK PAGE 53 LINE 8