


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail Deliver Report to:
Conservation Division
State Corporation Commission
101 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

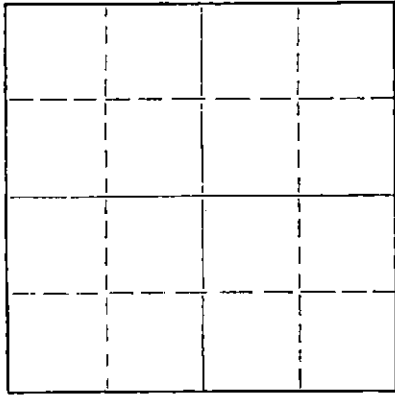

Locate well correctly on above
Section Plat

Stafford County, Sec. 15 Twp. 24 Rge. (E) 15 (W)
Location as "NE/CNW/SW" or footage from lines NE NE SW
Lease Owner Arizona Oil Exploration, Inc.
Lease Name Thurrow Well No. 1
Office Address 600 North Scottsdale Road, Scottsdale, Arizona
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed August 11 19 61
Application for plugging filed February 24 19 62
Application for plugging approved February 24 19 62
Plugging commenced February 24 19 62
Plugging completed February 27 MARCH 3. 19 62
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production November 19 61
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Lackamp
Producing formation Simpson Depth to top 4156 Bottom 4166 Total Depth of Well 4277 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	219'	8-5/8"		None
		0	4277'	4-1/2"		3600'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged back to 4125' with sand and 5 sacks of cement at 4125', filled hole with heavy mud bridged hole at 215'; cemented with 20 sacks of cement. Filled hole with mud to 35'; filled hole with cement to top of surface.

RECEIVED
STATE CORPORATION COMMISSION
3-6-62
MAR 6 1962
3-6-62
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Central Pipe Pulling Company
Address P. O. Box 656, Great Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.
Allan Berwick (owner or operator) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Allan Berwick
Allan Berwick
600 N. Scottsdale Road, Scottsdale, Ariz.
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of February, 19 62.

My commission expires December 14, 1965

Elaine H. Taylor
Elaine H. Taylor
Notary Public