


STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

WELL PLUGGING RECORD

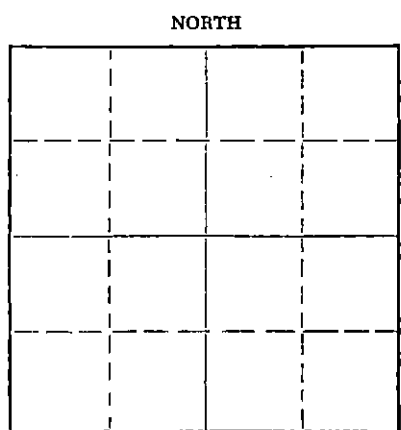

Stafford County. Sec. 5 Twp. 24S Rge. 12 (W)
Location as "NE/CNWxSWx" or footage from lines A/C NW/4 NE/4 NE/4
Lease Owner Barnett Oil Company
Lease Name Knoche Well No. 1
Office Address 411 First Nat'l Bank Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed April 7, 19 59
Application for plugging filed April 7, 19 59
Application for plugging approved April 8, 19 59
Plugging commenced April 7, 19 59
Plugging completed April 7, 19 59
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Frank Broadfoot
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3967 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	205'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with mud to 200'; pushed plug to 200' and set 20 sacks of cement on top of plug; filled hole with mud to 35'. Set top plug at 35' and wired. Put 1/2 sack of hulls on top and 10 sacks of cement. Plugged by Halliburton.

Plugged rate hole with 1/2 sack of hulls and 2 sacks of cement.

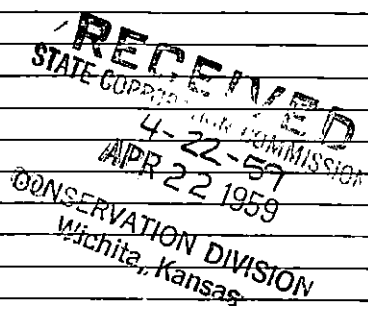

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Barnett Drilling, Inc.
Address 409 First National Bank Building, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
F. H. Rousey (employee of owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) F. H. Rousey
411 First Nat'l Bank Bldg., Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 21st day of April, 1959

Mildred J. Willis
Notary Public.
My commission expires February 27, 1960.

PLUGGING
FILE SEC. 5 T. 24 R. 12W
BOOK PAGE 28 LINE 22

BARNETT OIL COMPANY
WELL LOG - KNOCHE NO. 1
A/C NW/4 NE/4 NE/4 OF SECTION 5-24S-12W
STAFFORD COUNTY, KANSAS

Date Commenced: 3-26-59
Date Completed: 4- 7-59

<u>From</u>	<u>To</u>	<u>Formation</u>
0	40	Surface Clay
40	55	Sand
55	85	Shale
85	105	Sand
105	205	Shale and shells
205	600	Shale
600	675	Sand and shale
675	700	Anhydrite
700	1600	Shale and shells
1600	1635	Lime and shale
1635	1765	Lime
1765	2450	Lime and shale
2450	2645	Shale and lime
2645	2890	Lime and shale
2890	3816	Lime
3816	3850	Lime and chert
3850	3967	Lime (Total Depth) (D. & A.)

Set 8 5/8", 28#, used casing at 205'
with 200 sacks of H.A. 5 cement.

RECEIVED
STATE CORPORATION COMMISSION

APR 22 1959

CONSERVATION DIVISION
Wichita, Kansas

PLUGGING

FILE SEC. 5 T. 24 R. 12W
BOOK PAGE 28 LINE 22