

Glasscock


15-185-12612-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH

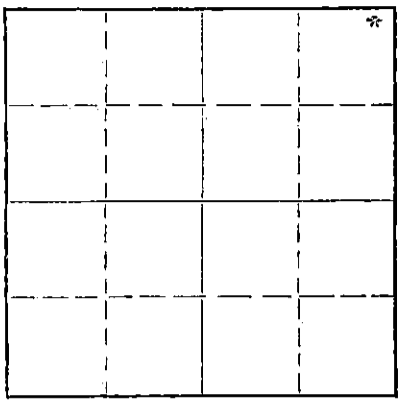

Locate well correctly on above
Section Plat

Stafford County, Sec 4 Twp. 24 Rge. 13 (E) W (W)
Location as "NE/CNW/SW" or footage from lines. NE NE NE
Lease Owner Lotus Oil Co.
Lease Name Glasscock Well No. 1
Office Address Box 30 Larned, Ks.
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 10-31 1957
Plugging completed 11-8 1957
Reason for abandonment of well or producing formation Formation Depleted

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Don Truen
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3940 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	331	none
				5 1/2	3938'	3183'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plug back with sand from 3689' to 3665' dump 5 sx. cement from 3665' to 3625'. Pulled 5 1/2. Mudded from 3625' to 305' and set 5' rock bridge from 305' to 300'. Dumped 25 sx. cement from 300' to 225'. Mudded from 225' to 35' and set 5' rock bridge from 35' to 30' and dumped 10 sx. cement from 30' to base cellar

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Ace Pipe Pulling Co.
Address Box 304 Great Bend, Ks.

STATE OF KANSAS COUNTY OF PAWNEE, ss.
J. L. HANNA (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. L. Hanna
Box 30 Larned Kans (Address)

SUBSCRIBED AND SWORN TO before me this 21 day of June, 1957

My commission expires 6-11-64 STATE CORPORATION COMMISSION [Signature] Notary Public.

NOV 22 1957
11-22-57
CONSERVATION DIVISION
Wichita, Kansas

PLUGG. 3
SEC 4 T 24 R 13W
PAGE 56 LINE 25

DRILLER'S LOG

COMPANY: CROWN OIL COMPANY, INC.
 CONTRACTOR: HILTON DRILLING COMPANY, INC.
 FARM NAME: GLASSCOCK NO. 1

LOCATION: NE NE NE 4-23-13W
 Stafford County, Kansas

ELEVATION: 1906 DF

COMMENCED: 11-23-49
 COMPLETED: 12-9-49

CASING USED: 8-5/8" at 331' with 200 sacks, 2 sacks CC
 5 1/2" at 3938' with 100 sacks

Surface Soil and Sand	150
Shale and Shells, Red Bed	245
Sandy Shale	405
Red Bed	770
Anhydrite	800
Shale and Shells	1625
Lime and Shale	1635
Lime	1945
Broken Lime and Shale	2080
Lime	2215
Lime and Shale	2355
Lime and Shale	2575
Shale and Shells	2715
Lime and Shale	3015
Lime	3430
Lime and Shale	3530
Lime	3830
Lime and Chert	3885
Shale	3897
Lime	3940
Total Depth	3940

GEOLOGICAL TOPS

Heebner Shale	3340	
Lansing (white)	3520	-1614
Viola	3824	
Simpson	3880	
Arbuckle	3936	-2030

STATE OF KANSAS)
) SS
 COUNTY OF BARTON)

RECORDED
 CORPORATION COMMISSION

OCT 24 1957

CONSERVATION DIVISION
 Wichita, Kansas

I, the undersigned, being duly sworn on oath, state that the above statement and log are true and a correct record and log of the well drilled at the location above described.

CROWN OIL COMPANY, INC.

Lester Oil Co.
By J. A. Amie

Subscribed and sworn to before me this 14th day of December, 1949.

Notary Public

My commission expires September 21, 1953.

PLUGGING
 FILE SEC 4 T.24 R 13W
 BOOK PAGE 56 LINE 25

RECEIVED
 STATE CORPORATION COMMISSION
 OCT 14 1957
 CONSERVATION DIVISION
 Wichita, Kansas