

KANSAS

FORM CP-3
Rev. 11-3-80

STATE CORPORATION COMMISSION

CONSERVATION DIVISION AGENT REPORT

API Number 15-155-20,499-0000245 North Water
Wichita, KS 67202Operator's Full Name Kelso Casing PullingComplete Address Box 176, Chase, Kansas 67524Lease Name Sankey "B" Well No. 1Location SW SW NW Sec. 13 Twp. 22 Rge. 10 (~~EAST~~) (West)County Reno Total Depth 3640'Abandoned Oil Well ☒ Gas Well ☐ Input Well ☐ SWD Well ☐ D & A ☐Other well as hereafter indicated ☐Plugging Contractor OperatorAddress License No. 683Operation Completed: Hour: 5:30 PM Day: 2 Month: February Year: 1981

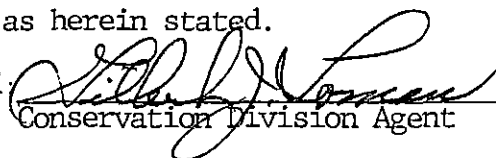
The above well was plugged as follows: 8 3/8" 205'-cum. circ. 5 1/2" 3640'-175 sacks
Push 5 1/2" plug to 3000'. Fill hole with sand to 2950' and
Cement with 5 sacks cement. Bail hole to 205'. Set rock
bridge From 205' to 195' and cement hole with 25 sacks
cement. Fill hole with mud to 40'. Rock bridge set From 40'
to 30' and hole cemented to base of cellar with 10 sacks
Cement.

STAMPED
SECTIONFEB - 5 1981 2-5-81CONSERVATION DIVISION
Wichita, Kansas

I hereby certify that the above well was plugged as herein stated.

INVOICED

Signed


Conservation Division AgentDATE 2-18-81INV. NO. 4495-00