
15-185-20991-0000

FORM CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

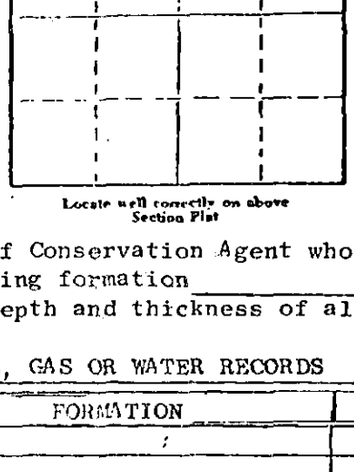

Locate well correctly on above Section Plat

Stafford County. Sec. 22 Twp. 24S Rge. 12W E/W
Location as "NE/CNW¼SW¼" or footage from lines
C-NW SW NW
Lease Owner Ronald Russ Prater, Inc.
Lease Name Reid Well No. 1
Office Address 240 N. Rock Road - Suite 235, Wichita, KS 67206
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole
Date Well completed December 23, 1979
Application for plugging filed Verbal Application 19
Application for plugging approved Verbal Approval 19
Plugging commenced December 23, 1979
Plugging completed December 23, 1979
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well William T. Owen
Producing formation Depth to top Bottom Total Depth of Well 4,120'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS — CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	249'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy rotary mud from 4,120 ft. (rotary total depth) to 400 ft. Set plug at 400 ft. and cemented with 40 sacks cement. Filled hole with heavy rotary mud from 400 ft. to 230 ft. Set plug at 230 ft. and cemented with 40 sacks cement. Filled hole with heavy rotary mud from 230 ft. to 40 ft. Set solid plug at 40 ft. and cemented to cellar with 10 sacks cement, 5 sacks cement in rat hole.

RECEIVED
STATE CORPORATION COMMISSION
JAN - 2 1980
1-2-80
CONSERVATION DIVISION
Wichita, Kansas

Plugging operations accomplished utilizing Dowell Oil Well cementing pump truck through 4½ inch drill pipe.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Dowell Div., Dow Chemical Co.
W. Railroad Avenue, Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Sedgwick, ss.
Dean Britting, Agent (XXXXXXX) of owner XXXXXXXXXXXXXXXXXXXXXXXXXX
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting
200 N. Main, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 28th day of December, 1979

Elsie Willison
Elsie Willison - Notary Public.

My commission expires July 25, 1982

API No. 15 -185-20,991

KANSAS DRILLERS LOG

COMPANY Ronald Russ Prater, Inc.

FARM Reid NO. 1

SEC. 22 T. 24S R. 12W
LOC. C-NW SW NW

COUNTY Stafford

ROTARY TOTAL DEPTH 4,120'
COMM. December 12, 1979 COMP. December 23, 1979
CONTRACTOR H-30, Inc. (Rig #7)
ISSUED December 28, 1979

CASING

10 3/4"
8 5/8" Set at 249' cemented w/225 sxs cement
5 1/2"
4 1/2"

ELEVATION 1,880'K.B.

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand	41'
Sand and Shale	253'
Shale and Sand	464'
Shale, Red Bed and Shells	1,487'
Shale	1,945'
Lime and Shale	2,510'
Shale and Lime	2,760'
Lime and Shale	3,545'
Shale and Lime	3,553'
Lime and Shale	3,875'
Lime	4,120'
Rotary Total Depth	4,120'

I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

H-30, INC.

Dean Britting
Dean Britting

State of Kansas)
) ss:
County of Sedgwick)

RECEIVED
STATE CORPORATION COMMISSION
JAN - 2 1980
CONSERVATION DIVISION
Wichita, Kansas

Subscribed and Sworn to before me a Notary Public in and for said county and state this 28th day of December, 1979.

Elsie Willison
Elsie Willison - Notary Public

My Commission Expires:

July 25, 1982