


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Stafford County. Sec. 23 Twp. 24S Rge. 12W XXX  
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines \_\_\_\_\_  
NW SE NW

Lease Owner E. K. Edmiston  
Lease Name Crawford Well No. 1  
Office Address 800 Vickers KSB&T Bldg., Wichita, Ks.  
Character of Well (Completed as Oil, Gas or Dry Hole) \_\_\_\_\_

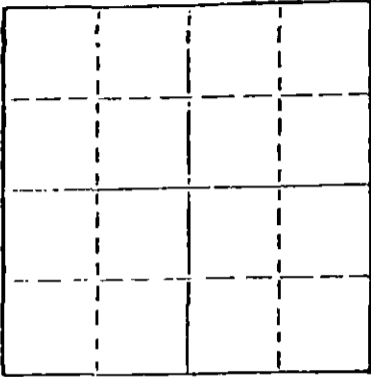

Locate well correctly on above  
Section Plot

Dry Hole  
Date Well completed October 3, 1977  
Application for plugging filed Verbal Application 1977  
Application for plugging approved Verbal Approval 1977  
Plugging commenced October 3, 1977  
Plugging completed October 3, 1977  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production 1977

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well William T. Owen  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4080'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	326'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy rotary mud from 4080 ft. (Rotary total depth) to 450 ft. Set plug at 450 ft. and cemented with 40 sacks cement. Filled hole with heavy rotary mud from 450 ft. to 300 ft. Set plug at 300 ft. and cemented with 35 sacks cement. Filled hole with heavy rotary mud from 300 ft. to 40 ft. Set solid plug at 40 ft. and cemented to cellar with 12 sacks cement, 3 sacks cement in rat hole.

Plugging operations accomplished utilizing Sun Oil Well cementing pump truck through 4-1/2 inch drill pipe.


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sun Oil Well Cementing, Inc.  
Box 169, Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Sedgwick, ss.  
Dean Britting, Agent (~~employee~~ of owner) ~~XXXXXXXXXXXXXXXXXXXX~~

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed \_\_\_\_\_ that the same are true and correct. So help me God.

(Signature) Dean Britting  
200 No. Main, Wichita, Kansas 67202  
(Address)



SUBSCRIBED AND SWORN TO before me this 7th day of October, 19 77

Elsie Willison  
Elsie Willison - Notary Public.

My commission expires June 30, 1978

KANSAS GEOLOGICAL SOCIETY API NO. - 15-185-20,766  
 KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU  
 KANSAS GEOLOGICAL SOCIETY BUILDING  
 508 EAST MURDOCK - WICHITA, KANSAS


COMPANY E. K. Edmiston

SEC. 23 T. 24S. 12W  
 LOC. NW SE NW

FARM Crawford NO. 1

TOTAL DEPTH 4080'  
 COMM. September 23, 1977 COMP. October 3, 1977  
 SHOT OR TREATED  
 CONTRACTOR H-30, Inc.  
 ISSUED October 7, 1977

COUNTY Stafford  
 KANSAS



CASING

20	10		
15	8-5/8"	326' cemented w/250 sxs cement	ELEVATION 1872 K.B.
12	6		
13	5		

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand, Shale and Red Bed	331'
Shale and Shells	1160'
Shale and Lime	1704'
Lime and Shale	2075'
Shale and Lime	2310'
Lime and Shale	3898'
Lime	3907'
Lime and Shale	4080'
Rotary Total Depth	4080'

Stamp: OCT 11 1977  
 KANSAS GEOLOGICAL SOCIETY  
 WICHITA, KANSAS


I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

H-30, INC.

*Dean Britting*  
 Dean Britting

State of Kansas }  
 County of Sedgwick } ss:

Subscribed and Sworn to before me a Notary Public in and for said county and state this 7th. day of October, 1977.



*Elsie Willison*  
 Elsie Willison - Notary Public

My Commission Expires:

June 30, 1978