


DISTRICT CONSERVATION AGENT'S REPORT

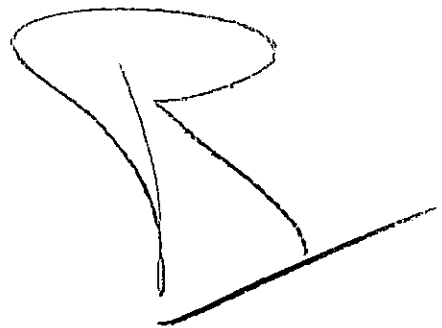

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____

LOCATION SE-SE-SE

SEC. 2 TWP. 24 RGE. 12-W

Dry Hole X Abandoned Oil Well _____ Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 3 Lease Hildebrand-"B"

Operator Deane Drilling Co. Inc. Address #710 Peter. Bldg. Wichita-Kans.

Field _____ County Stafford

Total Depth 3830 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 3/8 - 194 ft. Circulated with cement.
5 1/2" casing set at 3860 ft. Cemented with 100 sacks cement.
Plugged back to 3800 ft with chat. Dumped 50 sacks
of cement at 3800 ft. Shot off & pulled the 5 1/2" casing -
Filled hole with mud to 194 ft. Put Rock Bridges
& 150 sacks of cement at 194 ft. Mud to 30 ft.
Plug to 10 sacks of cement at the surface.

RECEIVED
STATE CORPORATION COMMISSION
12-5-50
DEC 5 - 1950

CONSERVATION DIVISION
C. Wichita, Kansas
District Conservation Agent

Date 12-2-50

PLUGGING
FILE SEC 2 T 24 R 12 W
BOOK PAGE 46 LINE 41