

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____

LOCATION NE - NE - SW.SEC. 3 TWP. 24 RGE. 12Dry Hole X Abandoned Oil Well _____ Abandoned Gas Well _____

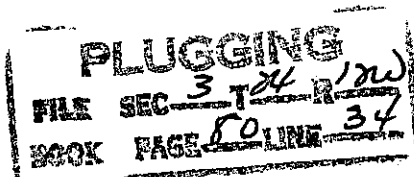
I have today completed supervision of plugging of:

Well No. 1 Lease BartlettOperator M. Huber, Corp. Address Box #460 - Pratt - Kans.Field _____ County StaffordTotal Depth 4048 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 1/2" - 170 ft. Circulated with cement.
5 1/2" casing at 3910 ft. Plugged back from bottom to
3830 ft with Large Well Plug - chert & cement.
Dumped 5 sacks of cement at 3830 ft. Shot off &
Pulled 5 1/2" casing - Filled with mud to 170 ft. Rock
Bridge & 15 sacks of cement at 170 ft. Mud to 30 ft
Plug & 10 sacks of cement at the surface

C. M. Stough
District Conservation Agent

Date 2 - 11 - 49

Rec'd
2-16-49