

15-155-20450-0000

11-17

2-070809

STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - Plugging Section  
130 S. Market, Room 2078  
Wichita, Kansas 67202

API Number: 15-155-20450

C SE SW SECTION 01 TWP 22 RANGE 10W

OPERATOR LICENSE 5184  
OPERATOR SHIELDS OIL PRODUCERS, INC.  
NAME & SHIELDS BLDG.  
ADDRESS RUSSELL, KS 67665

660 FEET FROM S SECTION LINE  
2970 FEET FROM E SECTION LINE  
LEASE NAME FAIR #1  
COUNTY RENO  
WELL TOTAL DEPTH 3207' 104.23  
PIPE 4 1/2" @ 3206'  
SURFACE CASING 8 5/8" @ 210'

ABANDONED OIL WELL  GAS WELL  INPUT WELL \_\_\_\_\_ SWD \_\_\_\_\_ D&A \_\_\_\_\_

OTHER WELL AS HEREINAFTER INDICATED: \_\_\_\_\_

PLUGGING CONTRACTOR: QUALITY WELL SERVICE

ADDRESS: 249 E BETH DR., STERLING, KS 67579 LICENSE: 31925

COMPANY TO PLUG AT: \_\_\_\_\_ HOUR: 12:00 DAY: 17 MONTH: 11 YEAR: 1998

PLUGGING PROPOSAL RECEIVED FROM: JOE MAES

COMPANY NAME: QUALITY WELL SERVICE PHONE: (316) 727-3410

WERE: SAND TO 3050' AND 4 SACKS  
35 SACKS @ 1350'  
35 SACKS @ 800'  
260' TO 0

11-25-98 RECEIVED  
KANSAS CORPORATION COMMISSION  
NOV 25 1998  
CONSERVATION DIVISION  
WICHITA, KS

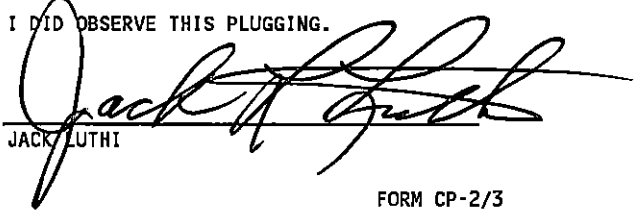
PLUGGING PROPOSAL RECEIVED BY: JACK LUTHI

PLUGGING OPERATIONS ATTENDED BY AGENT? ALL  PART \_\_\_\_\_ NONE \_\_\_\_\_

COMPLETED: HOUR: 4:30 DAY: 17 MONTH: 11 YEAR: 1998

ACTUAL PLUGGING REPORT: SANDED BOTTOM TO 3050' AND 4 SACKS OF COMMON. SHOT 4 1/2" CASING OFF AT 1350'.  
PULLED SHORT SUB AND PUMPED 35 SACKS OF GELL AND 200 POUNDS OF HULLS AND 35 SACKS OF CEMENT. PULLED TO 800'.  
PUMPED 2 GELL, 150 LBS. OF HULLS AND 35 SACKS OF CEMENT. PULLED TO 260'. CIRCULATE CEMENT TO SURFACE.

REMARKS: ALLIED 60/40 POZ, 4% GEL.

I DID OBSERVE THIS PLUGGING.  
  
JACK LUTHI

FORM CP-2/3  
REV. 3/90

DEC 01 1998  
60394