


STATE OF KANSAS  
STATE CORPORATION COMMISSION

## WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

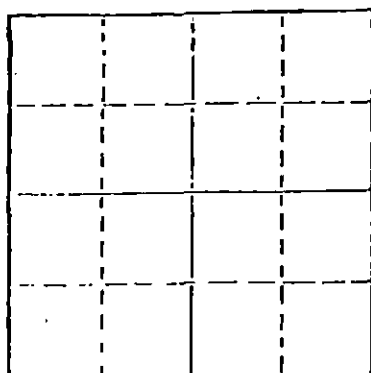

Locate well correctly on above  
Section Plot

Reno County, Sec. 13 Twp. 22S Rge. 10W E/W  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines

SW SW NW  
Lease Owner Kelso Casing Pulling  
Lease Name Sankey "B" #1 Well No.  
Office Address Box 176, Chase, Ks. 67524  
Character of Well (Completed as Oil, Gas or Dry Hole)

Date Well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 1/28/81 19  
Plugging completed 2/2/81 19  
Reason for abandonment of well or producing formation

Depleted  
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman  
Producing formation Depth to top Bottom Total Depth of Well 3640'  
Show depth and thickness of all water, oil and gas formations.

## OIL, GAS OR WATER RECORDS

## CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	205	None
				5-1/2"	3640	2505'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pushed plug to 3000', ran one barrel sand and 5 sacks cement. Made shot at 2492'.  
Pulled total string of 123 joints. Bailed water from 50' to 200'. Plugged well.  
Set bridge at 200' and set 25 sacks cement. 10 sacks cement on top. Plugging complete.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor KELSO CASING PULLING  
CHASE, KANSAS

STATE OF Kansas COUNTY OF Rice, ss.  
R. Darrell Kelso (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso  
Chase, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 9th day of February, 1981

My commission expires



Joan Kelso  
Notary Public.

FEB 10 1981

2-10-81  
CONSERVA  
Wichita, KS 67203