


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Stafford County. Sec. 5 Twp. 24 Rge. (E) 12 (W)
Location as "NE/CNW%SW%" or footage from lines NE SE SE
Lease Owner The Carl Todd Drilling Company, et al
Lease Name Knoche Well No. 2
Office Address 404 KEH Building, Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) gas
Date well completed November 27 19 51
Application for plugging filed July 20 19 54
Application for plugging approved July 20 19 54
Plugging commenced July 21 19 54
Plugging completed July 23 19 54
Reason for abandonment of well or producing formation depleted

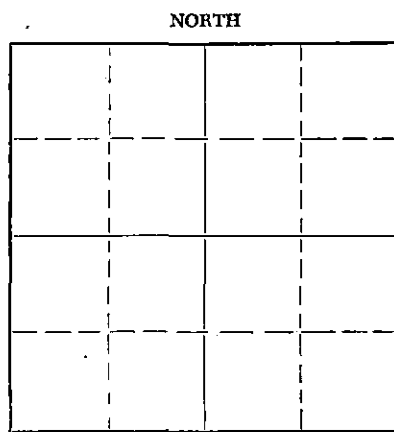

Locate well correctly on above
Section Flat

If a producing well is abandoned, date of last production May 19 54
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well M. A. Rives
Producing formation Viola 3805 Depth to top _____ Bottom _____ Total Depth of Well 3807 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	264	
				5 1/2	3807	2550'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mixed and pumped in 20 sacks Gel mud and pumped in 70 sacks cement. Stopped plug at 250'. Mud and cement by Globe Cementing Company.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Globe Cementing Company
Address _____

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Carl Todd (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Carl Todd
404 KEH Building, Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 2nd day of August, 19 54

My commission expires August 31, 1955
Notary Public.

PLUGGING
FILE SEC 5 T 24 R 12W
BOOK PAGE 49 LINE 37

8-3-54

THE CARL TODD DRILLING COMPANY
404 KFH Building
Wichita 2, Kansas

The Carl Todd Drilling Company, et al
KNOCKE #2
NE SE SE 5-24S-12W
Stafford County, Kansas

Date commenced: November 11, 1951
Date completed: November 27, 1951

Elevation: 1880 R.B.

Rotary Tools: 0' to 3813'

Casing Record:

8-5/8" casing set at 264' with
175 sacks cement

5-1/2" casing set at 3807' with
200 sacks of cement

LOG

0	160	Clay, sand and gravel
160	667	Red bed and shells
667	689	Anhydrite
689	1220	Shale and shells
1220	1350	Shale and salt
1350	1475	Shale and shells
1475	1530	Shale and lime
1530	1660	Lime and shale (sandy)
1660	1880	Lime and shale
1880	1980	Lime
1980	2990	Lime and shale
2990	3290	Lime
3290	3520	Lime and shale
3520	3720	Lime
3720	3770	Lime and shale
3770	3775	(Chirty) Congl and shale
3775	3805	Chirty Congl
3805	3807	Viola - Rotary T.D.


Formation Tops - R.B.

Viola 3805

D.D. to 3821-1/2 Tested 324,000 Cfg.
Acid 1000 gal.
Gauged 5,050 MCF
S. I. C. H. P. 935 PSI

I, Carl Todd, do hereby certify that
the above log is correct to the best
of my knowledge and belief.

Carl Todd



STAFFORD COUNTY DIVISION
Wichita, Kansas