

WELL PLUGGING RECORD

FORMATION PLUGGING RECORD

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Strike out upper line
when reporting plug-
ging of formations.

Pratt County, Sec. 23 Twp. 29 Rge. (E) 15 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. NE/4 NE/4 NE/4

Lease Owner. Lion Oil Company

Lease Name. Howell Well No. 1

Office Address. Box 639, Pratt, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed. 8-23 19 51

Application for plugging filed. 8-23 19 51

Application for plugging approved. 8-23 19 51


Plugging commenced. 8-23- 19 51

Plugging completed. 8-23 19 51

Reason for abandonment of well or producing formation. Dry Hole

If a producing well is abandoned, date of last production. 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

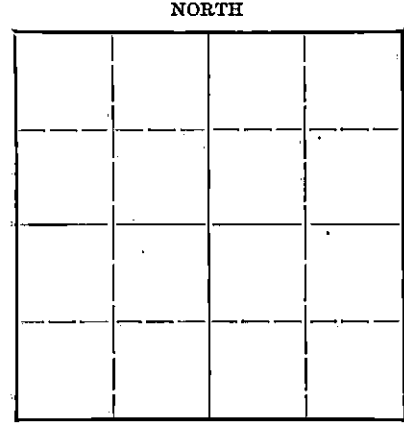

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well. C. D. Stough

Producing formation. Depth to top. Bottom. Total Depth of Well. 4850' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from.....feet to.....feet for each plug set.

460
Wooden Plug set at 250'. Cemented with 15 sacks on top of Plug.
Filled hole with mud to 30'. Set wooden Plug at 30' and cemented with 10 sacks cement on top of Plug.

RECEIVED
STATE CORPORATION COMMISSION
SEP 6 X 1951 9-6-51
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to. Vernon Hayes
Address. Box 639, Pratt, Kansas

STATE OF Kansas, COUNTY OF Pratt, ss.
Joe Costello (employee of owner) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Joe Costello

Box 639, Pratt, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 5th day of Sept, 1951

My commission expires with office

PLUGGING
FILE SEC 23 T 29 R 15W
BOOK PAGE 105 LINE 35

Leticia Harmon Regey Duds
Notary Public

WELL LOG HOWELL NO. 1

Lion Oil Company, Lease Owner

Section 23, Twp. 29S, Rge. 15W

Garvey Oil, Contractor

Location: NE NE NE

Commenced: August 1, 1951

County: Pratt, Kansas

Completed: August 23, 1951

Production: D & A

Casing: 406' of 8 5/8" w/250 sax

Rotary Total Depth: 4850'

All figures below indicate bottom of formation:

88	Surface soil & Clay	3905	Lime & Shale
136	Sand	3090	Lime, Shale & Sand
249	Gravel	4010	Sand
318	Red Bed & Shells	4037	Lime
406	Shale & Shells	4070	Lime & Shale
870	Shale & Sand	4236	Lime
1490	Shale & Shells	4252	Lime & Chert
1870	Shale, Shells & Salt	4423	Lime
2025	Salt, Shale & Lime	4517	Lime & Shale
2070	Lime & Shale	4553	Lime & Shale
2175	Anhydrite & Shale	4608	Lime
2390	Lime & Shale	4618	Chert & Shale
2460	Shale & Shells	4749	Lime
2515	Lime & Shale	4758	Sand & Shale
2745	Broken Lime	4788	Shale, Sand & Cherty Lime
3075	Shale & Shells	4845	Shale & Lime
3240	Lime & Shale	4850	Lime
3335	Lime		
3504	Lime & Shale	4850'	R.T.D.
3615	Sandy Lime		
3705	Shale		
3850	Lime		

I hereby certify that this is a true and correct log of the above mentioned well.

GARVEY OIL

SEP 6 X 1951

CONSERVATION DIVISION
Wichita, Kansas

By Eric H. Jager
Eric H. Jager

STATE OF KANSAS)
) SS.
COUNTY OF SEDGWICK)

Subscribed to and sworn to before me, a Notary Public, in said County and State, this 27th day of August, 1951.

PLUGGING
FILE SEC 23 T 29 R 15 W
BOOK PAGE 106 LINE 35

Charlotte Anderson
Notary Public

My commission expires: October 13, 1954