


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Pratt County, Sec. 7 Twp. 26S Rge. (E)13 (W)
Location as "NE/CNW/SW" or footage from lines SW/4
Lease Owner Blaik Oil Company
Lease Name Henry C. Toland Well No. 1
Office Address 203 Park Ave., Oklahoma City, Okla. 73102
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed October 5, 1970
Application for plugging filed October 13, 1970
Application for plugging approved October 5, 1970
Plugging commenced October 5, 1970
Plugging completed October 5, 1970
Reason for abandonment of well or producing formation _____

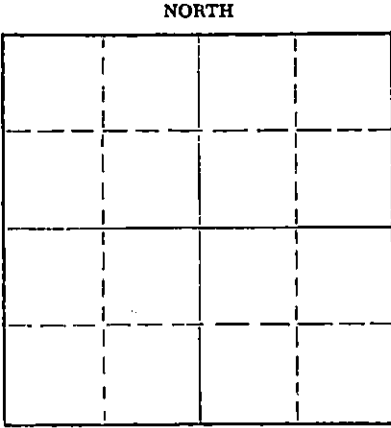

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well R. Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4110 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	357'	8-5/8"	357'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.


Filled hole with heavy mud to 600 feet. Set first plug at 600 feet w/40 sacks cement.
Filled hole with heavy mud to 350 feet. Set second plug at 350 feet w/20 sacks cement.
Filled hole with heavy mud to 40 feet. Set third plug at 40 feet w/10 sacks cement and
1/2 sack hulls. Job complete at 2:15 AM, Oct. 5, 1970.

RECEIVED
STATE CORPORATION COMMISSION
OCT 14 1970
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Gabbert-Jones, Inc.
Address 830 Sutton Place, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.
James S. Sutton, II (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James S. Sutton, II
830 Sutton Place - Wichita, Kansas 67202
(Address)



Subscribed and sworn to before me this 13 day of October, 19 70
Barbara J. Layton
Barbara J. Layton Notary Public.

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG


HENRY C. TOLAND #1
SW/4 Section 7-26S-13W
Pratt County, Kansas

Commenced: September 27, 1970
Completed: October 5, 1970

OPERATOR - Blaik Oil Company

DEPTH		FORMATION	REMARKS
From	To		
0	235	Sand and shale	
235	837	Red bed	Ran 17 joints of 8-5/8" casing, set @ 357' w/350 sacks cement.
837	851	Anhydrite	
851	1540	Shale and red bed	
1540	1931	Shale and shells	
1931	3775	Lime and shale	
3775	4110	Lime	
4110	TD		Dry and abandoned.

I, JAMES S. SUTTON, II, certify this is a correct copy of the Drillers' Log for the well drilled in the SW/4 Section 7-26S-13W, Pratt County, Kansas, to the best of my knowledge and belief.




JAMES S. SUTTON, II

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 13 day of October, 1970, personally appeared JAMES S. SUTTON, II, to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

My Commission Expires February 1, 1972



Barbara J. Layton, Notary Public

