


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Pratt County, Sec. 11 Twp. 26S Rge. 13W ~~XXXX~~  
Location as "NE/CNW 1/4 SW 1/4" or footage from lines XXXX

S/2 S/2  
Lease Owner Vincent Oil Corporation  
Lease Name Keller Well No. 1  
Office Address 230 O.W. Garvey Bldg., Wichita, Ks.  
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole



Locate well correctly on above  
Section Plat

Date Well completed September 13, 1978  
Application for plugging filed Verbal Application  
Application for plugging approved Verbal Approval  
Plugging commenced September 13, 1978  
Plugging completed September 13, 1978  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ted Dewey  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4285'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	252'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy rotary mud from 4285', rotary total depth to 540'/  
Set plug at 540' and cemented with 50 sacks cement. Filled hole with  
heavy rotary mud from 540 feet to 270 feet. Set plug at 270 feet and  
cemented with 40 sacks cement. Filled hole with heavy rotary mud from  
270 feet to 40 feet. Set solid plug at 40 feet and cemented with 12  
sacks cement, 3 sacks cement in rat hole.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Allied Cementing Co., Inc.  
Box 31, Russell, Kansas 67665

STATE OF Kansas COUNTY OF Sedgwick, ss.  
Dean Britting, Agent ~~(Agent of owner)~~

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting  
200 No. Main, Wichita, Kansas 67202  
(Address)

SUBSCRIBED AND SWORN TO before me this 19th day of September, 1978



Elsie Willison  
Notary Public.

My commission expires July 25, 1982

RECEIVED  
STATE CORPORATION COMMISSION  
9-20-78  
SEP 20 1978

CONSERVATION DIVISION  
Wichita, Kansas

KANSAS DRILLERS LOG

COMPANY Vincent Oil Corporation

SEC. 11 T. 26S R. 13W

FARM Keller

NO. 1

LOC. S/2 S/2

ROTARY TOTAL DEPTH 4285'

COUNTY

Pratt

COMM. September 2, 1978

COMP. September 13, 1978

CONTRACTOR H-30, Inc.

ISSUED September 19, 1978

CASING

10 3/4"  
8 5/8"  
5 1/2"  
4 1/2"

Set at 261' cemented w/225 sxs cement

ELEVATION 1913 K.B.

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand and Shale	262'
Shale and Shells	1800'
Shale and Lime	2033'
Lime and Shale	2484'
Shale and Lime	2763'
Lime and Shale	3200'
Shale and Lime	3528'
Lime and Shale	4008'
Lime	4062'
Lime and Shale	4165'
Lime, Chert and Shale	4210'
Lime and Shale	4260'
Shale and Sand	4285'
Rotary Total Depth	4285'


I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

H-30, INC.

*Dean Britting*  
\_\_\_\_\_  
Dean Britting

State of Kansas )  
County of Sedgwick ) ss:

Subscribed and Sworn to before me a notary public in and for said county and state this 19th. day of September, 1978.

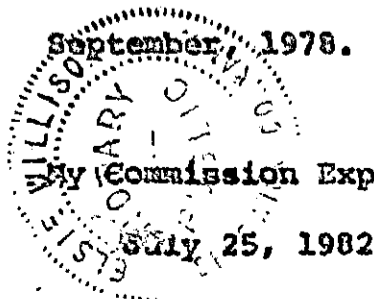

*Elsie Willison*  
\_\_\_\_\_  
Elsie Willison -Notary Public  
STATE CORPORATION COMMISSION

RECEIVED  
SEP 20 1978