

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Reno County, Sec. 15 Twp. 24 Rge. 4W (E) (W)

Location as "NE/CNW/SW" or footage from lines. C N/2 NE NW

Lease Owner SeRoBee Drilling Company, Inc.

Lease Name Tonn Well No. 1

Office Address 5301 North Broadway Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil-depleted

Date well completed April 2, 19 65

Application for plugging filed November 29, 19 66

Application for plugging approved November 29, 19 66


Plugging commenced December 7, 19 66

Plugging completed December 7, 19 66

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

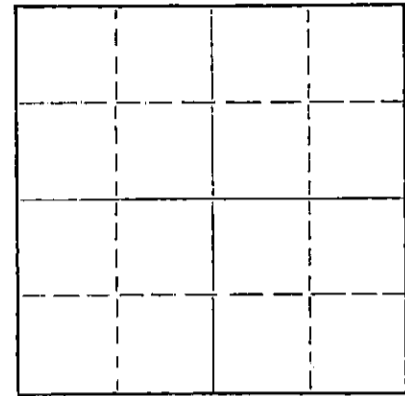

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert Toman

Producing formation Depth to top Bottom Total Depth of Well 3376 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Table with 7 columns: FORMATION, CONTENT, FROM, TO, SIZE, PUT IN, PULLED OUT. Includes a 'RECEIVED STATE CORPORATION COMMISSION MAY 10 1968 5-1068' stamp.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole filled with sand to 3300' and cemented with 5 sacks. Hole filled with mud to 215'. Rock bridge set from 215' to 200' and hole cemented to base of cellar with 4 1/2 yards ready mix cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Bert Self Casing Pulling Company

Address R. R. # 4 Hutchinson, Kansas

STATE OF Sedgwick COUNTY OF KANSAS, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Paul S. Seper

(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of May, 1968

My commission expires Nov 30th 1970

Bryan J. Gould Notary Public

KANSAS GEOLOGICAL SOCIETY
 KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
 KANSAS GEOLOGICAL SOCIETY BUILDING
 508 EAST MURDOCK - WICHITA, KANSAS.

COMPANY **SeRobee Drilling Co., Inc.**

SEC. **15** T. **24** R. **4W**
 LOC. **C N/2 NE NW**

FARM **Tonn** NO. **1**

TOTAL DEPTH **3324**

COUNTY **Reno**


COMM **3-25-65**

COMP. **4-2-65**

KANSAS

SHOT OR TREATED

CONTRACTOR **SeRobee Drilling Co., Inc.**



ISSUED

CASING

20	TO	3/4 @ 278' W/225 sax
15	B	
12	6	
13	S	1/2 @ 3324' W/75 sax

ELEVATION **1463 KB**

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

0 - 200	Sand
200 - 215	Shale
215 - 480	Shale & Shells
480 - 580	Anhydrite & Lime
580 - 865	Broken Lime
865 - 2598	Lime & Shale
2598 - 3015	Lime
3015 - 3324	Lime & Shale

11-29-66

RECEIVED
 STATE CORPORATION COMMISSION

NOV 29 1966

CONSERVATION DIVISION
 Wichita, Kansas