

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

PRATT County. Sec 24 Twp. 26 Rge. 13W (E) (W)

Location as "NE/CNW*SW*" or footage from lines SE SE SW

Lease Owner SANTA-FE PIPE & SUPPLY, INC

Lease Name GOBIN Well No. 1

Office Address BOX 562, GREAT BEND, KANSAS

Character of Well (completed as Oil, Gas or Dry Hole) OIL WELL

Date well completed DECEMBER 18 1954

Application for plugging filed JULY 18 1966

Application for plugging approved JULY 25 1966


Plugging commenced JULY 19 1966

Plugging completed AUGUST 1 1966

Reason for abandonment of well or producing formation DEPLETED

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

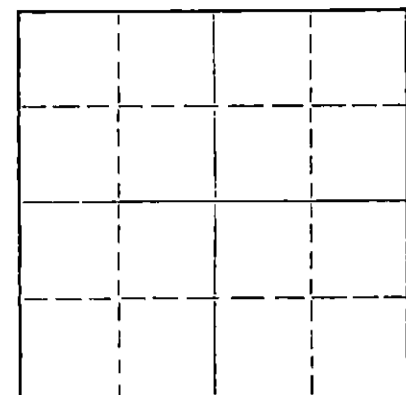

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well MR ARCHIE ELVING

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4337 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	435	NONE
				5 1/2"	4337	3712

Stamp: AUG 8 1966
8-8-66
CONSERVATION DIVISION
Wichita, Kansas

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

- 4337 - 4150 - SAND
- 4150 - 4120 - 5 SACKS CEMENT
- 4120 - 325 - MUD
- 325 - 315 - ROCK BRIDGE
- 315 - 300 - 5 SACKS CEMENT
- 300 - 240 - 20 SACKS CEMENT
- 240 - 40 - MUD
- 40 - 30 - ROCK BRIDGE
- 30 - BASE- 10 SACKS CEMENT

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor SANTA-FE PIPE & SUPPLY, INC

Address BOX 562, GREAT BEND, KANSAS

STATE OF KANSAS, COUNTY OF BARTON, ss.

_____, (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]

BOX 562, GREAT BEND, KANSAS
(Address)

SUBSCRIBED AND SWORN to before me this 6TH day of AUGUST 1966

My commission expires JULY 31, 1970

Mary M. Guenier
Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
503 East Murdock, Wichita, Kansas


COPY

Company- JOHN W. MCKNAB
Farm- Ada Cobin No. 1

SEC. 24 T. 26 R. 13W
SE SE SW

Total Depth. 4342'
Comm. 11-29-54 Comp. 12-18-54
Shot or Treated.
Contractor.
Issued. 4-2-55

County Pratt
KANSAS



Elevation. 1934' RE

Production. 101 BO

CASING:

8 5/8" 435' cem w/200 sx
5 1/2" 4337' cem w/100 sx

Figures indicate Bottom of Formations.

red rock & shale	550
shale & red rock	920
shale & shells	1815
shale & lime	1935
sandy lime	2065
lime	2185
shale & lime	3220
lime	3277
shale & lime	3580
sand, shale & lime	3687
shale & lime	3726
lime	3800
shale & lime	3846
lime	3975
lime & shale	4020
lime	4221
Simpson sand	4250
shale & lime	4327
shale	4342
Total Depth	
Tops: Scout	
Heebner	3538
Brown Lime	3703
Lansing	3726
Kinderhook	4155
Viola	4170
Simpson	4221
Arbuckle	4333

REGISTERED
STATE CONSERVATION COMMISSION
AUG 8 1966
CONSERVATION DIVISION
Wichita, Kansas