


RECEIVED
STATE CORPORATION COMMISSION
12-19-74
DEC 19 1974
FORM CP-4
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

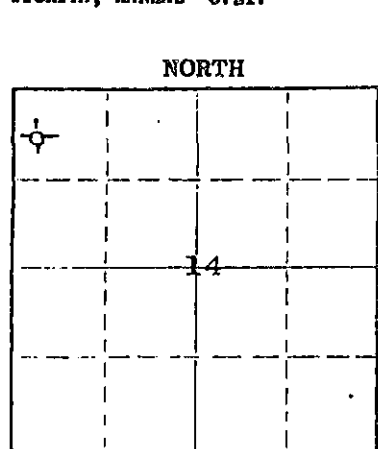

Locate well correctly on above Section Plat

Pratt County, Sec. 14 Twp. 26S Rge. 13W (EX) (W)
Location as "NE/CNW/SW" or footage from lines W/2 NW NW
Lease Owner Vincent Oil Corporation
Lease Name Griffith Well No. 2
Office Address 719 Union Center, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed December 12, 19 74
Application for plugging filed December 12, 19 74
Application for plugging approved December 12, 19 74
Plugging commenced December 12, 19 74
Plugging completed December 12, 19 74
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well _____
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4265 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0'	454'	8-5/8"	454'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

4265'-279' - Hole filled with mud.
279'-275' - Plug
275'-40' - Cement, 35 sacks.
40'-36' - Plug
36'-6' - Cement, 15 sacks. (Bottom of cellar)
2 sacks cement in rat hole.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton Cementing Co.
Address Pratt, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK ss.

John H. Knightley Agent (owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John H. Knightley
301 S. Broadway, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 18th day of December, 19 74

My commission expires March 12, 1975
Stella J. Lipps
Notary Public.

Vincent Oil Corporation - Griffith #2
W/2 NW NW Sec. 14-26S-13W
Pratt County, Kansas

Contractor: D. R. Lauck Oil Company, Inc.
301 S. Broadway
Wichita, Kansas 67202

Commenced: November 26, 1974
Completed: December 12, 1974

Drillers Log

Sand	86
Clay	130
Sand	158
Shale	257
Shale & Sand	795
Anhydrite	805
Shale & Shells	1910
Lime & Shale	2625
Shale & Lime	2940
Lime	3045
Lime & Shale	3280
Lime	4197
Chert	4219
Chert & Lime	4265 RTD

RECEIVED
STATE CORPORATION COMMISSION

DEC 19 1974

CONSERVATION DIVISION
Wichita, Kansas