


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Pratt County, Sec. 25 Twp. 26 Rge. 13 (E) W (W)

Location as "NE/CNW/SW" or footage from lines S/2 SW NW
Lease Owner Beardmore Drilling Company
Lease Name Lunt Well No. 2
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 5-8-61 19____
Plugging completed 6-15-61 19____
Reason for abandonment of well or producing formation Depleted.

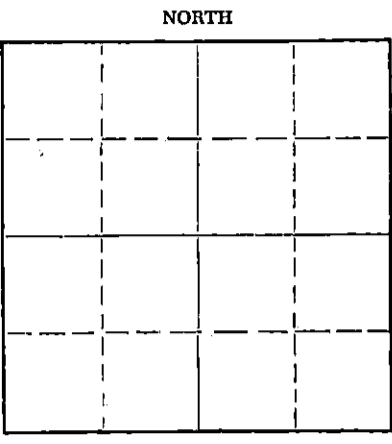

Locate well correctly on above Section Flat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Fred Hampel
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4301 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	376'	None
				5-1/2"	4301'	3437'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to 4233', ran sand to 4150' and dumped 5 sacks of cement to 4122' with dump bailer. Pulled 5 1/2" casing. Set bridge @ 300', ran 20 sacks of cement to 232'. Mudded hole to 40', set 10' rock bridge to 30' and ran 10 sacks of cement to base of cellar.

PLUGGING COMPLETE.

5-26-81
RECEIVED
STATE CORPORATION COMMISSION
MAY 26 1961
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Knight Casing Pulling Co.
Address Chase, Kansas

STATE OF Kansas COUNTY OF Rice, ss.
Noel J. Knight (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 18th day of May 1961

My commission expires May 20, 1964 Milton J. Volin Notary Public.



LUNT NO. 2

S/2 SW NW
Section 25-26S-13W
Pratt County, Kansas

Drilled for: Beardmore, O. A. Sutton and
N.C.R.A.
Drilled by: Beardmore Drilling Company

Casing Record:

8-5/8" 376'W/250 Sacks
5-1/2" 4301'w/60Sacks

Drilling Commenced: April 30, 1954
Drilling Completed: May 11, 1954

Elevation: KB. 1939
DF 1936

*Plug back T.D. 4233'
Pipe Perforations 4214' To 4226'*

<u>FORMATION</u>	<u>DEPTH</u>
Cellar	5
S. Soil	25
Sand	240
Red Rock - Shale	376
Red Rock - Shells	760
Anhydrite	780
Shale - Shells	1835
Lime - Shale	2185
Sand	2210
Shale - Lime	2950
Lime - Shale	3220
FShale - Lime	3375
Lime - Shale	3485
Lime Broken	3570
Lime	4245
Cored	4285
Shale	4301 T.D.

TOPS:

Heebner	3541
Douglas Sand	3604
Brown Lime	3704
Lansing	3734
Mississippi	4137
Kinderhook	4160
Viola	4188
Simpson Shale	4236
Dolomite	4244
Simpson Sand	4263

5-5-61
RECEIVED
STATE CORPORATION COMMISSION
MAY 5 1961
CONSERVATION DIVISION
Wichita, Kansas

DST #1 - 4176-4210 - Open 1 hour, shut in 15 minutes, Recovered 60' mud. BHP 150#.

DST #2 - 4246-4272 - Open 1 hour, shut in 15 minutes, good blow, recovered 90' gas cut mud, specks of oil, 60' oil and gas cut mud with some water, 120' oily, gassy, muddy water. BHP 800#.

STATE OF KANSAS

COUNTY OF **WEDGWOOD** ss

I, the undersigned, being duly sworn on oath state that the above and within statement is a true and correct record and log of the well drilled on the location above-described, to the best of my knowledge and belief.

Subscribed and sworn to before me this _____ day, 1954.

[Signature]

Leonard P. [Signature]
Notary Public

My Commission Expires: January 28, 1956