

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-095-22081-00-00
Spot: NW Sec/Twnshp/Rge: 10-29S-8W
1320 feet from N Section Line, 1320 feet from W Section Line
Lease Name: BOCK KINSLER Well #: 1
County: KINGMAN Total Vertical Depth: 4280 feet

Operator License No.: 4706
Op Name: MESSENGER PETROLEUM, INC.
Address: 525 S MAIN ST
KINGMAN, KS 67068

String	Size	Depth (ft)	Pulled (ft)	Comments
PKR		4148		
PROD	4.5	4272		150 SX
SURF	8.625	232		225 SX
T1	2.375	4148		

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 01/29/2016 11:00 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: DAVID BRADY Company: QUALITY WELL SERVICE Phone: (620) 532-5400

Proposed Plugging Method: AS PER KCC RULES & REGS

Plugging Proposal Received By: STEVE VANGIESON WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 01/29/2016 11:00 AM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

TIED ONTO THE 4.5 CASING AND PUMED 30 SKS OF CEMENT AND 100# OF HULLS TO CLOSE OFF THE PERFS. TOC 3850', SI 1500#. RECOVERED CASING FROM 2810' AND PULLED TO 1200', WHERE 35 SKS OF CEMENT WAS SPOTTED. PULLED CASING TO 800', AND PUMPED 35 SKS OF CEMENT. PULLED CASING TO 300' AND CIRCUALTED CEMENT TO SURFACE WITH 130 SKS OF CEMENT.

Perfs:


Top	Bot	Thru	Comments
4170	4172	CSG	

Remarks: QUALITY WELL SERVICE CLASS A CEMENT

Plugged through: CSG

District: 02

Signed _____

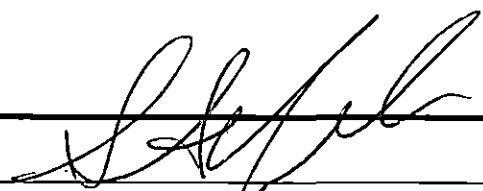

(TECHNICIAN)
KCC WICHITA

FEB 03 2016

RECEIVED

Form CP-2/3

2.9.16