


DISTRICT CONSERVATION AGENT'S REPORT

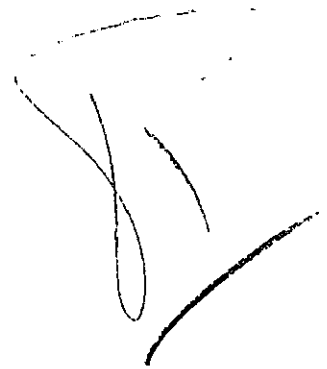

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. 47-17

LOCATION SW-SW-NE

SEC. 23 TWP. 24 RGE. 11-W

Dry Hole _____ Abandoned Oil Well X Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 1 Lease M. Volker-"A"

Operator Jansland Oil & Gas Co Address Box #7 - Elliswood - Kans.

Field _____ County Stafford

Total Depth 3801 Feet.

(Describe briefly the manner in which the well was plugged)

Sueper Pipe 10 3/4 - 255 ft - Circulated with cement
7 casing set at 3790 ft. Cemented with 125 sacks cement.
Plugged back to 3780 ft. with chat - Dumped 6 sacks
of cement at 3780 ft. Shot off & Pulled the 7 casing
Filled hole with mud to 2950 ft. Set Rock Bridge &
20 sacks of cement at 250 ft. Mud to 30 ft. Plug
& 10 sacks of cement at the Sueper
Pipe Pulling, Inc., Plugging Contractors

PLUGGING
FILE SEC 23 TWP 24 RGE 11-W
BOOK PAGE 47 LINE 17

RECEIVED
STATE CORPORATION COMMISSION
DEC 18 1950
CONSERVATION DIVISION

12-18-50

C. N. Stouck
District Conservation Agent

Date 12-15-50