

DISTRICT CONSERVATION AGENT'S REPORT

R

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. 116-5LOCATION SW-NW-NESEC. 23 TWP. 24 RGE. 11-WDry Hole _____ Abandoned Oil Well X Abandoned Gas Well _____

I have today completed supervision of plugging of:

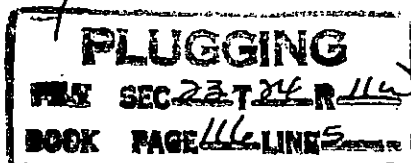
Well No. 1 Lease W. C. VolkerOperator Standard Oil Co. Address Box #7 - Ellinwood - Kans.Field _____ County StaffordTotal Depth 3802 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 10 3/4 - 250 ft - Circulated with cement.
6" casing set at 3720 ft - Plugged back from
bottom at 3785 ft - 1 sack of cement dumped at
3785 ft - Shot off & pulled the 6" casing - Filled
with mud to 250 ft - Set Rock Bridge & 20 sacks
of cement at 250 ft - Mud to 30 ft - Bridge &
10 sacks of cement at the surface -

Pipe Packing, Inc.
Plugging Contractors

C. H. Stogdell
District Conservation Agent

Date 11-3-49

NOV 5 1949 11-5-49
STATE CORPORATION
COMMISSION
KANSAS