


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

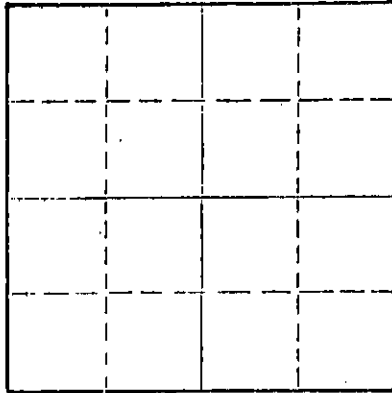

Locate well correctly on above
Section Plat

Pratt County, Sec. 36 Twp. 29 S Rge. (E) 14 (W)
Location as "NE/CNW/SW" or footage from lines SW NW SW
Lease Owner Specter Pipe & Supply, Inc.
Lease Name Earlywine Well No. 2
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 10-11-18 19
Application for plugging filed Dec. 23, 1972 19
Application for plugging approved Jan. 3, 1973 19
Plugging commenced 2/10 1973
Plugging completed 4/13 1973
Reason for abandonment of well or producing formation failure to produce profitably
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G.R. Bieberstien
Producing formation Arbuckle Depth to top 4557 Bottom 4560 Total Depth of Well 4565 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8" OD	350 ft.	none
				5 1/2" OD	4560 ft.	3050 ft.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged back to 3950 with sand
Dumped 5 sacks cement
Set 10' rock bridge at 240'
Filled with readymix.

RECEIVED
STATE CORPORATION COMMISSION
APR 24 1973
CONSERVATION DIVISION
Wichita, Kansas

4-24-73

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Lynch Casing Pulling Co
Address Rt 4, Great Bend, Kans 67530

STATE OF Kansas, COUNTY OF Russell, ss.
Specter Pipe & Supply, Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
[Address]
(Address)

Subscribed and Sworn to before me this 23rd day of April, 1973

My commission expires May 23, 1975
[Signature] Notary Public.

WELL LOG BUREAU -- KANSAS GEOLOGICAL SOCIETY
412 Union National Bk Bldg., Wichita, Kansas

COPI


15-151-10070-0000

Company - RINE, ROBERTS & MURPHY, BUCK
Farm - Earlywine No. 2

SEC. 36 T. 29S R. 14W
SW NW SW

Total Depth. 4565'
Comm. 9-21-48 Comp. 10-11-48
Shot or Treated.
Contractor. R. W. Rine Drlg. Co.
Issued. 12-25-48

County. Pratt
KANSAS



CASING:
8 5/8" 359' cem.
5 1/2" 4560' cem.

Elevation. _____

Production. 1191 Bbls.

Figures Indicate Bottom of Formations.

sand	190
red bed, red rock	359
shale, shells	725
shale, sand	960
shale, red bed	1310
shale, shells	1725
shale	1870
shale, shells	1915
shale	2000
shale, sandy lime	2175
shale, lime	2875
shale	3205
shale, lime	3905
lime	4430
lime, chert	4457
lime, shale	4486
lime	4565

Total Depth

Tops: Kansas City Lansing	3960
Viola	4419
Simpson Shale	4464
Simpson Sand	4478
Arbuckle	4557

8-15-72

RECEIVED
STATE CORPORATION COMMISSION
AUG 15 1972
CONSERVATION DIVISION
Wichita, Kansas