

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Pratt County, Sec. 34 Twp. 29 Rge. 14 (E) (W)X

Location as "NE/CNWXSWX" or footage from lines. NW/SW/SW
Lease Owner Appleton Oil Co.
Lease Name Davis Well No. 1
Office Address 2501 City Nat'l. Bldg., Oklahoma City, Oklahoma 73108
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 3-30-72 _____ 19____
Plugging completed 4-6-72 _____ 19____
Reason for abandonment of well or producing formation Depleted

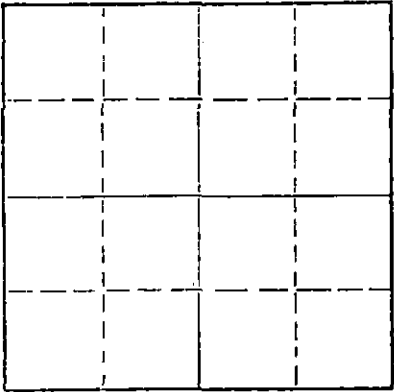

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4554 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	788	None
				4 1/2	4544	3648.13'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Measured T. D. at 4470 ft. Pushed a plug to 4375', dumped 25 sacks sand and 4 sacks cement. Shot casing at 3700' and 3606'. Pulled a total of 116 jts. of 4 1/2" casing. Pushed a plug to 250' and built a 15 ft. rock bridge. Plugged well with 4 yds. readymix concrete.

RECEIVED
STATE CORPORATION COMMISSION
APR 7 1972
4-7-72
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Rockhold Engineering, Inc.
Address P. O. Box 698, Great Bend, Kansas 67530

STATE OF Kansas, COUNTY OF Barton, ss.
James W. Rockhold (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.



(Signature) James W. Rockhold James W. Rockhold
P. O. Box 698, Great Bend, Kansas 67530
(Address)

Subscribed and Sworn to before me this 6th day of April, 1972

My commission expires September 30, 1975
Cathy Miller Notary Public.