


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

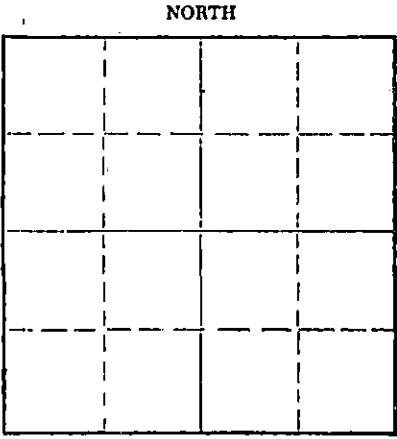

Locate well correctly on above
Section Plat

Pratt County. Sec. 7 Twp. 26 Rge. 11 (E) (W)
Location as "NE/CNW/SW" or footage from lines C N/E NW
Lease Owner Triple "D" Drilling Co., Inc.
Lease Name Newell #2 Well No. _____
Office Address 2400 N. Main St. Hutchinson, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Plugged hole & skidded rig
Date well completed Dec. 6, 1967 _____
Application for plugging filed Dec. 6, 1967 _____
Application for plugging approved Dec. 6, 1967 _____
Plugging commenced Dec. 6, 1967 _____
Plugging completed Dec. 6, 1967 _____
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well A. Elving Pratt, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUR IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill hole to 300' Set plug & 1/2 sk hulls and 25 cement

Fill hole to 40' set plug & 1/2 sk hulls and 10 cement

2 sk cement in Rathole

4-17-68

RECEIVED
STATE CORPORATION COMMISSION
APR 17 1968
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Triple "D" Drilling Co., Inc
Address 2400 N. Main Hutchinson, Kansas 67501

STATE OF Kansas COUNTY OF Reno, ss.
R.R. Dutton (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R R Dutton
2400 N. Main St. Hutchinson, Kansas 67501
(Address)

SUBSCRIBED AND SWORN TO before me this Jan. 2 day of _____, 19 68

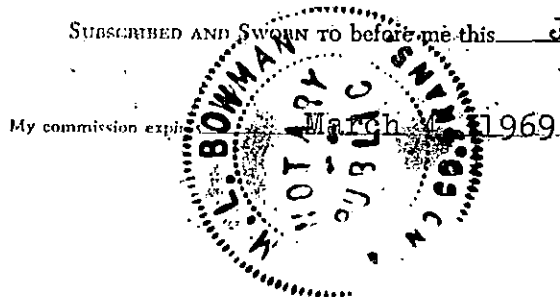

M. L. Bowman
M. L. Bowman
Notary Public.

15-151-20054-0000

C NE NW

Sec. 7-26S-11W Pratt County, Kansas

NEWELL #2 - Pratt, Kansas

Drilling Contractor - Triple "D" Drilling Co., Inc.

Operator - Triple "D" Drilling Co., Inc.

Date Started - November 20, 1967

Date Plugged - December 6, 1967

Surface to 150	-----	Sand	
150--400	-----	Shale Shells	
400--815	-----	Red Bed	
815-- 1685	-----	Shale Shells	
1685-- 2430	-----	Shale Lime	
2430-- 2700	-----	Shale	
2700-- 2980	-----	Shale & Lime	Total Depth

Casing Record

Set 815' of 8 5/8 casing with 275 sacks cement

4-17-68

RECEIVED
STATE CORPORATION COMMISSION
APR 17 1968
CONSERVATION DIVISION
Wichita, Kansas