

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Pratt County, Sec. 7 Twp. 26 Rge. 11 (E) x (W)

Location as "NE/CNW/SW" or footage from lines C/NE/NW

Lease Owner Triple 'D' Drilling Company, Inc

Lease Name Newell Well No. 1

Office Address 2400 North Main, Hutchinson, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) plugged hole & skidded rig

Date well completed November 21, 19 67

Application for plugging filed 19

Application for plugging approved November 21, 1967 19

Plugging commenced November 21, 1967 19


Plugging completed November 21, 1967 19

Reason for abandonment of well or producing formation
drill pipe stuck in hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

NORTH

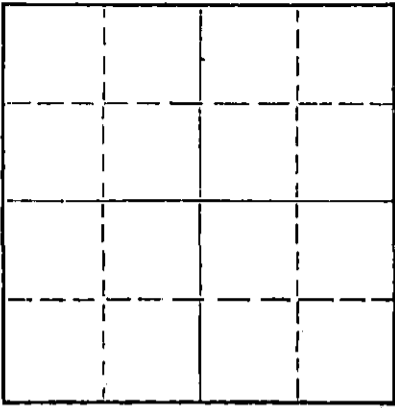

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Archie Elving, Pratt, Kansas

Producing formation Depth to top Bottom Total Depth of Well 3410 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Table with 7 columns: FORMATION, CONTENT, FROM, TO, SIZE, PUT IN, PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole to 300 feet - set plug and dumped 2 sacks of hulls and 25 sacks of cement.

Filled hole with heavy drilling mud - set plug and dumped 1/2 sack hulls and 10 sacks of cement

dumped 2 sacks of cement in rat hole

11-30-67

NOV 30 1967

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Triple 'D' Drilling Company, Inc

Address 2400 North Main, Hutchinson, Kansas 67501

STATE OF Kansas, COUNTY OF Reno, ss.


R. R. Dutton (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. R. Dutton

2400 North Main, Hutchinson, Kansas 67501 (Address)

SUBSCRIBED AND SWORN to before me this 28th day of November, 1967

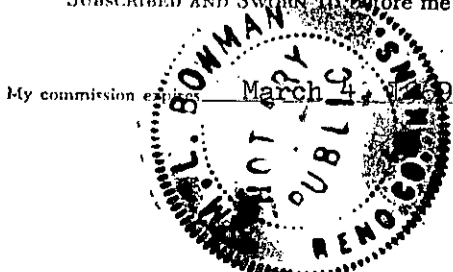

M. L. Bowman

Notary Public.

NEWELL #1 - PRATT COUNTY, KANSAS
 Drilling Contractor - Triple 'D' Drilling Company, Inc
 Operator - Triple 'D' Drilling Company, Inc
 Date Started - October 10, 1967
 Date Plugged - November 21, 1967

Surface	to	44	Sand	
44	to	146	Sand and Shale	
146	to	490	Shale	
490	to	825	Red Bed	
825	to	1,360	Shale & Sand	
1,360	to	1,680	Shale	
1,680	to	3,320	Lime & Shale	
3,320	to	3,410	Lime & Shale	Total Depth

CASING RECORD

Set 825' of 8-5/8" casing with 375 sacks cement

RECEIVED
 NOV 30 1967
 11-30-67
 CONSERVATION DIVISION
 Wichita, Kansas