

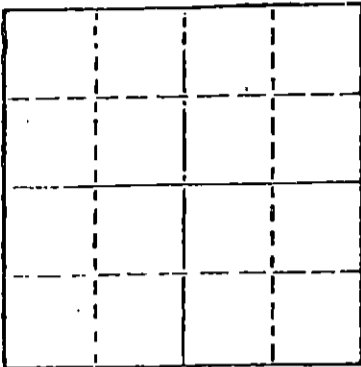
STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Pratt County. Sec. 15 Twp. 26S Rge. 14 E/W  
Location as "NE/CNW $\frac{1}{2}$ SW $\frac{1}{2}$ " or footage from lines  
SE SE NW

Lease Owner John Jay Darrah, Jr.  
Lease Name Towler/Moore Well No. 2  
Office Address 405 Century Plaza, Wichita, Ks.  
Character of Well (Completed as Oil, Gas or Dry Hole)  
Dry Hole



Locate well correctly on above  
Section Plat

Date Well completed April 24 19 82  
Application for plugging filed 19  
Application for plugging approved April 24 19 82  
Plugging commenced April 24 19 82  
Plugging completed April 24 19 82  
Reason for abandonment of well or producing formation  
Dry Hole  
If a producing well is abandoned, date of last production  
NA 19

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Maurice V. Leslie  
Producing formation -- Depth to top Bottom Total Depth of Well 4500  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface	0	346	8 5/8	336	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid  
was placed and the method or methods used in introducing it into the hold. If cement or other  
plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to  
\_\_\_\_\_ feet for each plug set.

Hole plugged with 125 sacks 60/40 pozmix  
4% gel, as follows:  
60 sacks @ 720'  
40 sacks @ 350'  
10 sacks & solid bridge @ 40'  
10 sacks rathole  
10 sacks mousehole

RECEIVED  
STATE CORPORATION COMMISSION

APR 30 1982

CONSERVATION DIVISION  
Wichita, Kansas

4-30-82

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Allied Cementing Co., Inc.

STATE OF KANSAS COUNTY OF SEDGWICK, ss.  
John Jay Darrah, Jr. ~~(employee or owner or operator)~~  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of  
the facts, statements, and matters herein contained and the log of the above-described well  
as filed and that the same are true and correct. So help me God.

(Signature) John Jay Darrah, Jr.  
405 Century Plaza, Wichita, Ks.  
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of April, 19 82

Dianne R. Fowler  
Dianne R. Fowler, Notary Public.

My commission expires August 25, 1984

D R I L L E R S L O G

COMPANY: JOHN JAY DARRAH, JR.  
 CONTRACTOR: MALLARD DRILLING CO., INC.  
 405 Century Plaza  
 Wichita, Kansas 67202

WELL NAME: TOWLER/MOORE #2  
 DESCRIPTION:  
 SE 1/4 SE 1/4 NW 1/4  
 15-26S-14W

RIG NO.: 1

COUNTY: Pratt

TOTAL DEPTH: 4500

ELEVATION: 1984 gr. 1992 kb

COMMENCED: April 17, 1982

COMPLETED: April 24, 1982

CASING RECORD:

8 jts. 8 5/8" 24# new surface

.....D. & A

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Surface soil, shale	0	352	Set 338' new 24# 8 5/8" surface casing at 346' with 350 sacks common cement, 2% gel, 3% CaCl. Cement did circulate. Plug down @ 2:45 p.m., April 17, 1982
Clay & shale	352	905	
Shale	905	3354	
Shale w/lime	3354	3660	
Shale & lime	3660	3792	
Lime	3792	4488	
TD		4500	Ran 1 log

Hole plugged with 125 sacks 60/40 pozmix, 4% gel, as follows: 60 sx @ 720'; 40 sx @ 350'; 10 sx & bridge plug @ 40'; 10 sx in rat-hole, 10 sx in mousehole. Plugging completed at 12:00 p.m., April 24, 1982.


RECEIVED  
 STATE CORPORATION COMMISSION

APR 30 1982 4-30-82


CONSERVATION DIVISION  
 Wichita, Kansas

STATE OF KANSAS )  
 ) SS.  
 COUNTY OF SEDGWICK )

I, JOHN JAY DARRAH, JR. of MALLARD DRILLING CO., INC., certify that this is a true and correct copy of the log of the Towler/Moore #2 well, to the best of my knowledge.

  
 John Jay Darrah, Jr. President

SUBSCRIBED AND SWORN to before me this 27th day of April, 1982.

  
 Dianne R. Fowler, Notary Public

My Commission Expires:  
 August 25, 1984