


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Pratt Rm Reno County, Sec. 35 Twp. 26 Rge. 13E/W
Location as "NE/CNW $\frac{1}{2}$ /SW $\frac{1}{2}$ " or footage from lines SE NW SE
Lease Owner K & E Drilling, Inc.
Lease Name John Brown #2 Well No.
Office Address Wichita, Kansas 67202
Character of Well (Completed as Oil, Gas or Dry Hole)

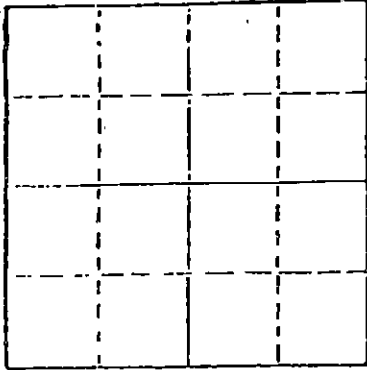

Locate well correctly on above
Section Plot

Date Well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 7/25/80 19
Plugging completed 7/30/80 19
Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Owen
Producing formation Depth to top Bottom Total Depth of Well 4380
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|--------|------------|
| | | | | 8-5/8 | 458 | none |
| | | | | 5 1/2" | 4377 | 2734 |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded to 3850' and ran 5 sacks cement. Shot pipe at 3620', 3405', 3205', 3000', 2810', 2715', worked pipe loose and pulled 87 joints. Squeezed hole with 15 sacks gel, 8 sacks hulls, 10 sacks gel. Released plug and displaced with 150 sacks 50-50 pozmix, 4% gel and 3% cc.

PLUGGING COMPLETE. 8-5-80

RECEIVED
STATE CORPORATION COMMISSION
7-5-1980
CONSERVATION DIVISION
Wichita, Kansas
ss.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KELSO CASING PULLING
CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE
R. DARRELL KELSO (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso
CHASE, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 31st day of July, 19 80

Margaret Melcher
Notary Public.

My commission expires



WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
503 East Murdock, Wichita, Kansas

15-151-10865-0000


COPY

Company- MCKNAB DRILG. CO.
Farm- Brown No. 2

SEC. 35 T. 26 R. 13W
SE NW SE

Total Depth. 4378'
Comm. 9-14-55 Comp. 11-11-55
Shot or Treated.
Contractor.
Issued. 10-8-60

County Pratt
KANSAS



CASING:
8" 458'
5" 4376'

Elevation. 1933' RB.

Production. 25 BOPD

Figures indicate Bottom of Formations.

COMPLETE DRILLERS LOG NOT AVAILABLE.

TOPS: SCOUT
Lansing 3744
Mississippi 4134
Kinderhook 4144
Arbuckle 4330

RECEIVED
OCT 10 1960