


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

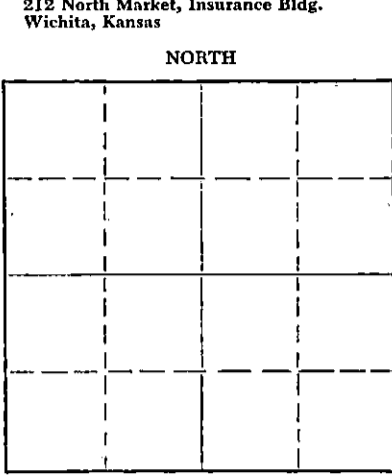

Reno County, Sec. 4 Twp. 23 Rge. 7W (E) (W)
Location as "NE/CNW*SW*" or footage from lines SW SW SE
Lease Owner Foraker and Brooks
Lease Name Graham Well No. 1
Office Address 722 Union Center, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 7-10-19 59
Application for plugging filed 7-10 19 59
Application for plugging approved 7-10 19 59
Plugging commenced 7-10 19 59
Plugging completed 7-10 19 59
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well Bill Lecamp, Stafford, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3616 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	208'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mud to 175 feet
Set plug at 175 feet with some hulls
and 20 sacks regular cement

mud to 35 feet
set plug at 35 feet with some hulls
cement with 10 sacks regular cement
to bottom of cellar

RECEIVED
STATE CORPORATION COMMISSION

JUL 14 1959

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor SeRoBee Drilling Co., Inc.
Address 412 Union National Building, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Paul S. Septer (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Paul S. Septer
412 Union National Building, Wichita, Ks.
(Address)

SUBSCRIBED AND SWORN to before me this 13th day of July, 19 59

Glenda L. Weber
Notary Public.

My commission expires October 3, 1962

PLUGGING
FILE SEC 4 T. 23 R 7W
BOOK PAGE 50 LINE 44

KANSAS GEOLOGICAL SOCIETY
 KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
 KANSAS GEOLOGICAL SOCIETY BUILDING
 508 EAST MURDOCK - WICHITA, KANSAS

15-155-00345-0000

COMPANY Foraker and Brooks


SEC. 4 T. 23 R. 7W

FARM Graham NO. 1

LOC. SW SW SE

TOTAL DEPTH 3616'
 COMM. 6-30-59 COMP. 7-10-59
 SHOT OR TREATED
 CONTRACTOR SeRoBee Drilling Co., Inc.
 ISSUED 7-13-59

COUNTY Reno
 KANSAS



CASING
 20 10
 15 Ran 208' 5/8" surface pipe
 12 6 w/150 sacks cement
 13 5

ELEVATION 1603 D.F.
 1606 K.B.

PRODUCTION D & A

FIGURES INDICATE BOTTOM OF FORMATIONS

0	-	208	Sand, Shale, Lime
208	-	880	Red Rock - Shale & Shells - salt
880	-	1130	Shale and Shells
1130	-	1505	Lime
1505	-	2655	Lime and Shale
2655	-	2832	Lime
		2832	Heebner Shale
		2849	Toronto
		2856	Base of Oread
		2870	Douglas Sand
		3024	Lansing
		3583	Shaley Conglomerate
		3606	Mississippian Chat
		3616	Rotary Total Depth

RECEIVED
 STATE CORPORATION COMMISSION

JUL 14 1959

CONSERVATION DIVISION
 Wichita, Kansas

PLUGGING
 FILE SEC. 4 T. 23 R. 7W
 BOOK PAGE 50 LINE 44