


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Stafford County. Sec. 10 Twp. 24 Rge. 13W (E) (W)
Location as "NE/CNW/SW" or footage from lines NW NW NE
Lease Owner Messman & Rinehart Oil Co.
Lease Name ##### Spare Well No. I
Office Address 1432 Wichita Plaza, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) ### Dry Hole
Date well completed 4-23 19 53
Application for plugging filed 4-II 19 67
Application for plugging approved 4-I3 19 67
Plugging commenced 4-I8 19 67
Plugging completed 4-2I 19 67
Reason for abandonment of well or producing formation _____

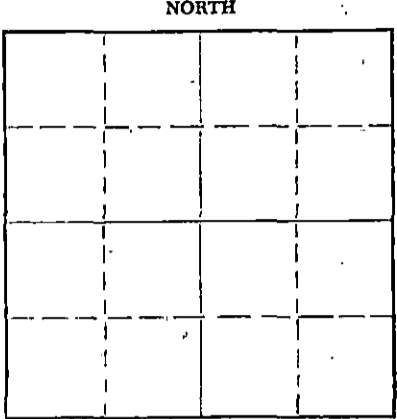

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19 _____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Archie Elving
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well #####
Show depth and thickness of all water, oil and gas formations. 1. D. 4056'

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"		3181'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pugged off bottom of hole with sand to 3500'. Dumped 5 sx of cement. Made 10' of rock bridge at 300'. Dumped 5 sx of cement. Dumped 4 yds. of Ready-Mix cement, filling to the bottom of the celler.

5-1-1967
MAY 1 1967
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Art Lamb Casing Pulling Co.
Address 2809 King St. Hutchinson, Kansas

STATE OF Kansas, COUNTY OF Reno, ss.
Art Lamb (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Art Lamb
2809 King St. Hutchinson, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 22 nd day of April, 19 67
Judy Lamb Notary Public.

My commission expires January 5, 1970

15-185-00167-0001


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company- J. D. FERRELL DRILLING CO. ET AL
Farm- Asher—
Spore
No. 1

SEC. 10 T. 24 R. 13W
NW NW NE

Total Depth. 4055
Comm. 4-9-53 Comp. 4-23-53
Shot or Treated.
Contractor. J. D. Ferrell Drlg. Co., Inc.
Issued. 5-16-53

County Stafford
KANSAS



Elevation. 1912 KB

Production. Dry

Figures Indicate Bottom of Formations.

cellar	5
sand	140
sand, shells, shale	165
shale & shells	441
red bed & shale	710
lime, shells & shale	1030
shale & shells	1180
salt & shale	1460
shale & shells	1720
lime & shale	1825
lime strks & shale	1945
shale & lime	2225
lime strks & shale	2330
lime & shale	2620
shale & shells	2795
shale & lime	2995
lime & shale strks	3090
lime	3315
lime & shale	3530
lime	3780
lime cherty	3815
lime	3850
cherty lime	3885
lime & chert	3906
cherty lime	3945
cherty lime & shale	3970
lime	3975
shale	3999
sand	4010
shale	4035
dolomite	4055
Total Depth	

Tops:	
Heebner	3352
Toronto	3372
Douglas	3388
Brown Lime	3482
Lansing	3511
Viola	3844
Simpson Shale	3972
Simpson Sand	3999
Arbuckle	4035

RECEIVED
STATE CONSERVATION COMMISSION
MAY 1 1957
CONSERVATION DIVISION
Wichita, Kansas