


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

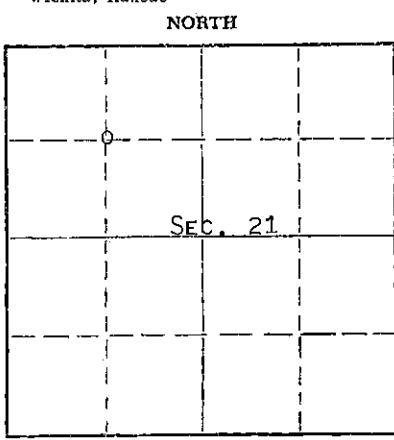

Locate well correctly on above Section Plat

STAFFORD County, Sec. 21 Twp. 24s Rge. 13 (X) (W)
Location as "NE/CNW/SEW" or footage from lines. C NW/4
Lease Owner PETROLEUM, INC.,
Lease Name BECKERDITE Well No. 2
Office Address R.R. #2, GREAT BEND, KANSAS
Character of Well (completed as Oil, Gas or Dry Hole) OIL WELL
Date well completed MARCH 9 1962
Application for plugging filed FEBRUARY 27 1969
Application for plugging approved FEBRUARY 28 1969
Plugging commenced MARCH 5 1969
Plugging completed MARCH 10 1969
Reason for abandonment of well or producing formation DEPLETION OF PRODUCING ZONE

If a producing well is abandoned, date of last production APRIL 20 1957
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well R. J. WARREN
Producing formation LANSING-KANSAS CITY Depth to top 3534 Bottom 3805 Total Depth of Well 4056 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
LANSING-KANSAS CITY	SLIGHT AMOUNT OF GAS & WATER	3676'	3697'	8-5/8"	365'	NONE
				5-1/2"	4056'	2511'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

PLUGGED BACK WITH SAND FROM 4000' TO 3600'. MIXED AND DUMPED 5 SACKS OF CEMENT FROM 3600' TO 3560'. MUD TO 225'. MIXED AND PUMPED IN 10 SACKS GEL, MIXED AND PUMPED IN 75 SACKS CEMENT FROM 225' TO BASE OF WELL CELLAR.

3-26-69
RECEIVED
STATE CORPORATION COMMISSION
MAR 26 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor RUSS CASING PULLING, INC.,
Address BOX 1082, GREAT BEND, KANSAS

STATE OF KANSAS, COUNTY OF BARTON, ss.
MONTE CHADD (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. MONTE CHADD, DIST. PROD. SUPT.

(Signature) *Monte Chadd*
R.R. #2, GREAT BEND, (Address)

SUBSCRIBED AND SWORN TO before me this 24 day of MARCH, 19 69

My commission expires MAY 28, 1969

Richard H. Dumas
Notary Public.

15-185-19229-0000
WELL LOG

COMPANY PETROLEUM, INCORPORATED

SEC. 21 T. 24S R. 13W

FARM BECKERDITE

NO. X 2

LOC. C-NW/4


TOTAL DEPTH 4056'

COUNTY STAFFORD CO., KANSAS

COMM. February 16, 1962

COMP. March 4, 1962

CONTRACTOR GARVEY DRILLING COMPANY



CASING 8-5/8" @ 360' w/275 sax.
5 1/2" @ 4056' w/150 sax.

ELEVATION 1924 DF

PRODUCTION Arbuckle

FIGURES INDICATE BOTTOM OF FORMATIONS

3-26-69
RECEIVED
STATE CORPORATION COMMISSION
MAR 26 1969
CONSERVATION DIVISION
Wichita, Kansas

150	Clay, sand & gravel
252	Red bed
295	Sand & shale
757	Red bed
785	Anhydrite
900	Shale & sehlis
1450	Shale
1700	Lime & shale
2100	Lime
2270	Lime & shale
3070	Shale & lime
3855	Lime
3902	Lime & chert
3974	Lime
4019	Lime & chert
4056	Lime
4056	T. D.

State of KANSAS }
County of BARTON } ss

I, VERNE A. MORRIS of GARVEY DRILLING COMPANY

upon oath state the above and foregoing is a true and correct copy of the log of the #2 BECKERDITE well.

Verne A. Morris

Subscribed and sworn to before me this 21st day of March 19 62

My Commission Expires: April 14, 1963

Arthur J. Miles
NOTARY PUBLIC