

STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Stafford County, Sec. 23 Twp. 24S Rge. 13W (E) (W)

Location as "NE/CNW/SW" or footage from lines S/2 S/2 NW/4

Lease Owner Hellar Drilling Company, Inc. & H. C. Hopkins

Lease Name Sutor Well No. 1

Office Address 1014 Union Center, Wichita, Kansas 67202

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed January 7 19 67

Application for plugging filed January 7 19 67

Application for plugging approved January 7 19 67


Plugging commenced January 7 19 67

Plugging completed January 7 19 67

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

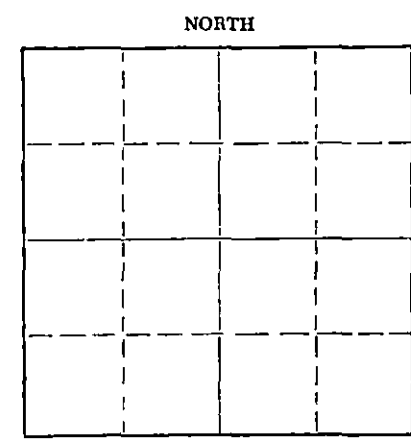

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Archie Elving, Box 248, Pratt, Kansas

Producing formation Depth to top Bottom Total Depth of Well 4102 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	246'	8 5/8"	246'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set Plug: 200'/25 sacks cement
40'/10 sacks cement
2 sacks cement in rat hole

1-17-67

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Hellar Drilling Company, Inc.
Address 1014 Union Center, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.
D.L. Hellar, President, Hellar Drilling Company, Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) D.L. Hellar, President
1014 Union Center, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 16th day of January, 19 67

My commission expires March 25, 1968.

Catherine Darcey
Notary Public.

DRILLER'S LOG

COMPANY: Hellar Drilling Company, Inc. & H. C. Hopkins
 1014 Union Center, Wichita, Kansas
 CONTRACTOR: Hellar Drilling Company, Inc., Wichita, Kansas
 LEASE: #1 Sutor
 LOCATION: S/2 S/2 NW/4 23-24S-13W, Stafford County, Kansas
 COMMENCED: December 15, 1966
 COMPLETED: January 7, 1967
 CASING: Set 8 5/8" surface casing @ 246'/225 sacks cement

0-247	Surface sand and shale
247-744	Shale & shells
744-758	Anhydrite
758-1060	Shale, Red Beds
1060-1430	Shale, Red Beds & Salt Section
1430-1870	Salt Section
1870-2200	Cherty lime
2200-2325	Lime & Shale
2325-2670	Shale & Lime
2670-2911	Lime & Shale
2911-3068	Shale & Lime Topeka Top
3068-3243	Lime (chalky)
3243-3414	Lime & shale
3414-3524	Douglas shale
3524-3594	L-KC lime
3594-3691	KC lime
3691-3758	Lime
3758-3855	Lime & shale
3855-3918	Shale & broken lime
3918-3940	Chert & cherty lime
3940-3976	Chert
3976-4005	Dense Lime
4005-4026	Shale & Lime
4026-4080	Cherty lime & sand, shale
4080-4096	Lime
4096-4102	Arbuckle dolomite
4102	Rotary Total Depth

Handwritten notes and a circular stamp. The stamp contains the date "JAN 11 1967".

D & A

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

I, D. L. Hellar, do hereby certify that the above and foregoing is a true and correct copy of the log of the #1 Sutor, located in S/2 S/2 NW/4 Sec. 23-24S-13W, Stafford County, Kansas, as reflected by the files of the Hellar Drilling Company, Inc.

HELLAR DRILLING COMPANY, INC.

By *D. L. Hellar*
 President - D. L. Hellar

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 16th day of January, 1967.

My Commission Expires:
 March 25, 1968

Catherine Darcey
 Notary Public - Catherine Darcey