


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway,
Wichita, Kansas

Stafford County, Sec. 24 Twp. 24 Rge. 13 (E) W (W)

Location as "NE/CNW/SW" or footage from lines SW SW NE
Lease Owner National Associated Petroleum Co.
Lease Name McMillan Well No. 1
Office Address 502 Ritz Building, Tulsa, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed August 9 19 62
Application for plugging filed August 9 19 62
Application for plugging approved August 9 19 62
Plugging commenced August 9 19 62
Plugging completed August 9 19 62
Reason for abandonment of well or producing formation Too low structurally

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

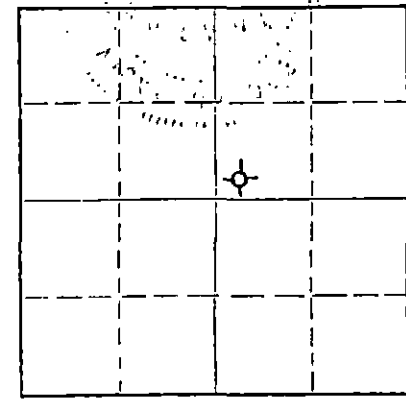

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well W. L. LaKamp, Route 1, Stafford, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4148 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|---------|------------|
| | | | | 8-5/8" | 268.95' | None |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud to 200'.
Set plug. Put in 20 sacks cement and 1/2 sack hulls. Filled with heavy mud up to 35'. Set plug. Filled to top with 1/2 sack hulls and 10 sacks cement.

8-17-1962


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor C-G Drilling Co.
Address 107 Rule Building, Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Jay H. Galloway (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me, God.

(Signature) Jay H. Galloway
Jay H. Galloway 107 Rule Building
(Address)

SUBSCRIBED AND SWORN to before me this 14th day of August 19 62
My commission expires May 20, 1963

Vicky Jacobs
Vicky Jacobs Notary Public.



WELL LOG

OPERATOR National Associated Petroleum Co. **SEC.** 24-24-13W
WELL NAME McMillan #1 **LOC.** SW SW NE
TOTAL DEPTH 4148' **COUNTY** Stafford
COMM. July 27, 1962 **COMP.** August 9, 1962 **STATE** Kansas
RIG NO. 2 **ELEVATION** 1904' K.B.
CASING: Ran 268.95' (9 jts.) 8-5/8" OD Surface Casing. **PRODUCTION:** D & A

All measurements taken from the top of rotary bushing.

| FROM | TO | FORMATION | DEVIATION FROM VERTICAL | REMARKS: |
|------|------|----------------|-------------------------|----------------|
| 0 | 195 | Sand | | |
| 195 | 215 | Shale | | |
| 215 | 730 | Red Bed | | |
| 730 | 756 | Anhydrite | | |
| 756 | 950 | Shale & Shells | | |
| 950 | 1185 | Shale & Shell | | |
| 1185 | 1600 | Shale & Shells | | |
| 1600 | 3115 | Shale & Lime | 00 - 2500 | |
| 3115 | 3388 | Lime & Shale | 00 - 2750 | |
| 3388 | 3540 | Lime | 00 - 3000 | |
| 3540 | 3596 | Lime & Shale | 00 - 3250 | DST 3564-3596' |
| 3596 | 4148 | Lime | 00 - 3500 | DST 3850-3882' |
| | | | 00 - 3750 | DST 3973-3983' |
| | | | 00 - 4000 | |

RECEIVED
 STATE COMMISSION
 AUG 17 1962
 CONSERVATION DIVISION

STATE OF KANSAS)
 COUNTY OF SEDGWICK) SS.

The undersigned hereby certifies that to the best of his knowledge and belief, the above facts are true and correct.

C-G DRILLING CO.
 By [Signature]

SUBSCRIBED AND SWORN TO, BEFORE ME, THIS 14th day of August, 1962.

My commission expires:
 May 20, 1963

[Signature]
 Vicky Jacobs - Notary Public

