

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Stafford County, Sec. 25 Twp. 24 Rge. (E) 13 (W)

Location as "NE/CNWxSWx" or footage from lines NE SW SE
Lease Owner Robert L. Austin
Lease Name Cline Well No. 1
Office Address P. O. Box 159, Stafford, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 19
Application for plugging filed August 22, 1969 19
Application for plugging approved August 25, 1969 19
Plugging commenced September 20, 1969 19
Plugging completed September 25, 1969 19
Reason for abandonment of well or producing formation Uneconomical to produce

NORTH

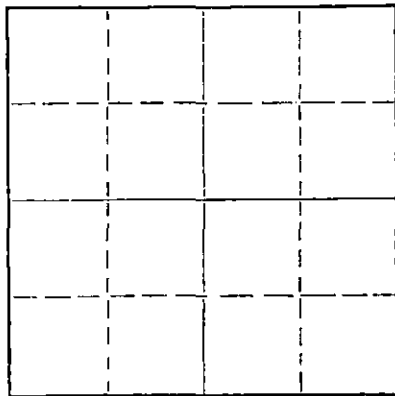

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 8/22/69 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well R. J. Warren
Producing formation Kansas City Depth to top 3627 Bottom 3718 Total Depth of Well 3800 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

RECEIVED
STATE CORPORATION COMMISSION
NOV 20 1969
CONSERVATION DIVISION
Wichita, Kansas

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

9/20/69 Unpack braden head - dig out cellar.
9/22/69 Dig deadman holes - rig up - push plug to 3500 - sand to 3475 - dump 5 sax cement - pull slips - work pipe 22".
9/23/69 Load hole with water - work pipe 22" - shoot @ 3025 - spot 35 bbls oil - shut well in
9/24/69 Pulled pipe into @ 1484 ft.-pull 47 joints
9/25/69 Globe Cement Co. pumped 15 sax gel - 3 sax hulls & 75 sax cement @ 400 lb. pressure - tear down.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Ralph Comstock Pipe Pulling, Inc.
Address 320 N. Park, Stafford, Kansas 67578

STATE OF Kansas, COUNTY OF Stafford, ss.
Robert L. Austin (employee of owner) or (owner or operator) of the above-described

well, being first sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Robert L. Austin P. O. Box 159, Stafford, Kans.
(Address)

Subscribed and sworn to before me this 10 day of November, 1969

My commission expires 1/28/73 Irene L. Benton Notary Public.

