


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD Strike out upper line when reporting plugging of formations.

Stafford County. Sec 26 Twp 24 Rge (E) 13 (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines SW/4 SW/4 NW/4
Lease Owner J. D. Ferrell
Lease Name Allender Well No. 1
Office Address Box 163, Great Bend, Kans.
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 12-10-48 19
Application for plugging filed 12-11-48 19
Application for plugging approved 12-11-48 19
Plugging commenced 12-11-48 19
Plugging completed 19
Reason for abandonment of well or producing formation

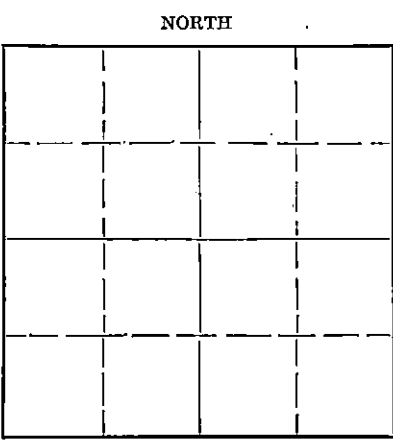

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well C. D. Stough
Producing formation Depth to top Bottom Total Depth of Well Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
		0	441	8 5-8"	12-11-48	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filed hole with heavy mud; set plug @ 250'; cemented with 15 sax bulk cement; set plug @ 30'; cemented with 10 sax bulk cement.

12-14-48

RECEIVED
DEC 14 1948
STATION
KANSAS

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to J. D. Ferrell
Address Box 163, Great Bend, Kans.

STATE OF Kansas, COUNTY OF Barton, ss.
J. W. Railsback (employee or owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. D. Ferrell Dry Co Inc
Box 163, Great Bend, Kans.
(Address)

SUBSCRIBED AND SWORN to before me this 13th day of Dec., 19 48

Notary Public

My commission expires Oct. 15, 1951

PLUGGING
FILE SEC 26 T 24 R 3W
BOOK PAGE 73 LINE 22

15-185-12364-0000

WELL LOG

J. D. Ferrell
Allender #1

Sec. 26-T. 24-R. 13W
SW/4 SW/4 NW/4
County: Stafford, Kans.

Total Depth: 4125'
Comm: 11-25-48 Comp: 12-10-48
Contractor: J.D. Ferrell Drlg. Co., Inc.
Issued 12-12-48 Rotary O-4125

Elevation 1928 K.B.
Production: Dry

Casing: 8 5/8" - 441' Cemented with 200 sax
bulk cement - circulated.

Figures Indicate Bottom of Formations:

Cellar	5
sand & red bed	250
red bed	370
sand	390
shale & shells	442
red bed - shale	770
Anhydrite	790
shale & shells	800
red bed, shale	1280
shale & shells	1750
lime & shale	1840
lime	1900
sand, shale, shells	1980
lime & shale	3440
lime	3560
lime & shale	3655
lime	3680
lime & chert	3730
lime	3875
lime & shale	3920
conglomerate	3955
cong. & chert	3965
lime & chert	4015
chert	4023
lime & chert	4070
chert & shale	4125
Total Depth	4125

Tops:	
Anhydrite	770
Kans. City	3571
Base K.C.	3900
Viola	3971
Simpson	4077
Total Depth	4125

We hereby certify this to be a correct and accurate log of the
above described well as shown on the daily Drilling Reports.

J.D. FERRELL DRILLING COMPANY, INC.

BY: J.W. Railsback
J.W. Railsback

Subscribed and sworn to before me this 13th day of December, 1948

Merle V. Soudy
Notary Public (Barton County)

My Commission Expires:
Oct. 15, 1951

RECORDED

DEC 14 1948 12-14-48

STATION
CONSTRUCTION
DIVISION

PLUGGING
FILE SEC 26 T 24 R 13W
BOOK PAGE 73 LINE 27