


15-095-20366-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Kingman County, Sec. 23 Twp. 27S Rge. 5W (E) (W)
Location as "NE/CNW/SE/SW" or footage from lines SW SW NE
Lease Owner Robert E. Campbell
Lease Name Bomholt Well No. 1
Office Address 417 South Glendale Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 19____
Application for plugging filed 19____
Application for plugging approved 19____
Plugging commenced 9-15 19 75
Plugging completed 9-18 19 75
Reason for abandonment of well or producing formation well didn't complete to satisfaction of owner
If a producing well is abandoned, date of last production 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

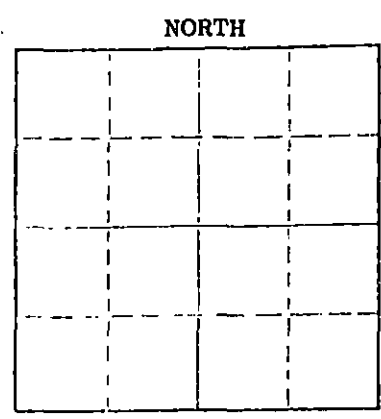

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Russell Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3810 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	175 sax of cement			8 5/8	211'	none
	100 sax of cement			5 1/2	3803'	3078'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

(BOTTOM HOLE PLUG) Sand back to 3750' and dumped 5 sacks of cement With dump bailer.

(TOP HOLE PLUG) Rock bridge from 200 to 210 feet and dump 35 sacks of cement - mudd and dirt up to 40'. 10' of rock bridge and dump 10 sacks of cement.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor DUNBAR DRILLING INC.
Address 5252 North Broadway Wichita, Kansas 67219

STATE OF Kansas COUNTY OF Sedgwick ss.
W. P. Simmons (employee of owner) or (owner - operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.
(Signature) *W. P. Simmons*

Subscribed and Sworn to before me this 26 day of September, 1975
My commission expires Nov. 19, 1977
Frances J. Simmons
Frances J. Simmons Notary Public.

RECEIVED
STATE CORPORATION COMMISSION

SEP 29 1975
9.29-75
CONSERVATION DIVISION
Wichita, Kansas



15-095-20366-0000

DRILLERS LOG

No. 1 Bomholt

CASING RECORD:	COMPANY: Mr. Robert E. Campbell	DESCRIPTION:
3-5/8" @ 211' w/175 sx. cmt.	CONTRACTOR: Red Tiger Drilling Co.	SW SW NE 23-27S-5W
5-1/2" @ 3,203' w/100 sx. cmt.	COMMENCED: September 6, 1974	Kingman County, Kansas
TOTAL DEPTH: 3,810'	COMPLETED: September 15, 1974	ELEVATION: 1,485' GR

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Sand	0	60	RECEIVED STATE CORPORATION COMMISSION JUL 22 1975 CONSERVATION DIVISION Wichita, Kansas
Shale Streaks & Sand	60	212	
Shale	212	1163	
Shale & Lime	1163	1830	
Lime & Shale	1830	2050	
Shale & Lime	2050	2870	
Lime & Shale	2870	3448	
Lime	3448	3754	
Lime & Chert	3754	3792	
Lime & Shale	3792	3810	

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Linda H. Dickens
Linda H. Dickens

Subscribed and sworn to before me this 20th day of September, 1974.

D'Ann Brennan
Notary Public

My Commission Expires:
December 28, 1977

