

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Stafford County. Sec. 13 Twp. 24 Rge. 14 (E) (W)

Location as "NE/CNW/SW" or footage from lines NW NE NW

Lease Owner Tom Lillard Pipe & Supply

Lease Name Shell Well No. 2

Office Address Shawnee, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) _____

Date well completed _____ 19__

Application for plugging filed 7-13-65 19__

Application for plugging approved 7-15-65 19__

Plugging commenced 7-29-65 19__


Plugging completed 8-2-65 19__

Reason for abandonment of well or producing formation _____

Dry

If a producing well is abandoned, date of last production _____ 19__

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

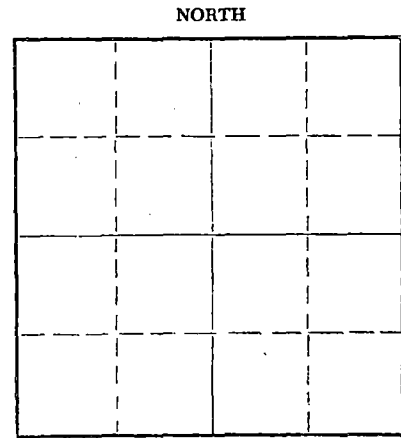

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well Archie V. Elving

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3844 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	910	None
				5 1/2	None	2516

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Moved in. Dug out cellar. Sanded to 3750'. Dumped 5 sacks of cement, on top of sand.

Working pipe. Shot pipe at 2830'. Working pipe.

Pulling pipe.

Finished pulling pipe. Mudded to 300'. Build 10' rock bridge. Dumped 25 sacks of cement. Mudded to 40'. Build 10' rock bridge. Capped well with 10 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION

AUG 13 1965

CONSERVATION DIVISION

Wichita, Kansas

Name of Plugging Contractor Forbes Casing Pulling, Inc.
Address P. O. Box 221 Great Bend, Kansas

8-13-1965

STATE OF Kansas, COUNTY OF Barton, ss.

J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes

P. O. Box 221 Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 11 day of August, 19 65

My commission expires May 27, 1969

Notary Public.

WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY
508 E. Murdock, Wichita, Kansas

COPY


Company - ATLANTIC REFG.
Farm - Shell No. 2

SEC. 13 T. 24 R. 11W
NW NE NW

Total Depth. 3845
Comm. 3-10-50 Comp. 3-28-50

County. Stafford
KANSAS

Shot or Treated.
Contractor. Holm Louis Drlg. & Flournoy Drlg.
Issued. 4-29-50



CASINGS
8 5/8" 899.30' cem. w/500 sx.
5 1/2" 3835.20' cem. w/250 sx.

Elevation. _____
Production. 80 BOPD

Figures Indicate Bottom of Formations.

shale & shells	290
sand & shale	360
shale	450
red bed	500
shale & lime shells	809
anhyd.	824
shale & lime shells	912
shale & shells	1680
lime & shale	1790
lime	1805
lime & shale	1830
lime	1890
lime & shale	2415
shale & lime	2605
shale & lime shells	2760
lime & shale	3340
lime	3520
shale & lime	3595
lime	3845
Total Depth	

Tops:
Lansing 3580

Perforated 3651 to 3661 w/64 jet holes.

Swabbed 3 FOPH 5% salt. wtr.

Producing area 3651-3661

RECEIVED
STATE CORPORATION COMMISSION
FEB 22 1966
CONSERVATION DIVISION
Wichita, Kansas