

FRED B. ANSCHUTZ
 #1 DEBUSK
 NW NW SW - Sec. 19-24S-14W
 Stafford County, Kansas

0	90	Surface Dirt & Sand
90	128	Shale & shells
128	265	Shale & shells
265	295	Shale
295	375	Red rock, shale & shells
375	905	Shale & shells
905	965	Shale & red bed
965	995	Anhydrite
995	1130	Shale & shells
1130	1390	Shale & shells
1390	1470	Shale
1670	1530	Salt
1530	1560	Shale & shells
1560	1820	Shale & shells
1820	1835	Lime
1835	1950	Lime
1950	2065	Lime & shale
2065	2155	Lime & shale
2155	2240	Lime
2240	2275	Lime
2275	2330	Shale & lime
2330	2430	Shale & lime
2430	2515	Lime
2515	2595	Lime & shale
2595	2645	Lime
2645	2675	Shale
2675	2785	Shale & lime
2785	2870	Broken lime & shale
2870	2970	Lime & shale
2970	3036	Lime
3036	3135	Lime
3135	3240	Lime, broken
3240	3325	Lime
3325	3420	Sandy shale & lime
3420	3500	Broken lime
3500	3593	Lime
3593	3632	Lime
3632	3695	Lime
3695	3779	Lime
3779	4028	Lime
4028	4065	Shale & lime
4065	4105	Lime & shale
4105	4150	Lime
4150	4217	Lime & shale
4217	4294	Lime
4294	4299	Lime
4299	4313	Chat & shale
4313	4343	Chert
4343	4370	Chert
4370	4390	Chert
4390	4413	Chert
4413	4450	Shale & lime
4450	4500	Shale
4500	4540	Lime
4540		ROTARY TOTAL DEPTH

COMMENCED: 2/27/51
 COMPLETED: 3/16/51

TOPS:


Anhy	965
Heeb.	3625
Tor.	3643
B. L.	3767
Lans.	3792
Cong.	4183
Vio.	4399
Simp.	4417
Arb.	4490

CASING RECORD:


Set 8-5/8" surface casing @ 200' with 125 sacks cement.

D & A
Abandoned

STATE OF KANSAS ()
 COUNTY OF SEDGWICK () SS

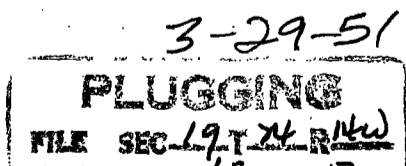

I hereby affirm that the foregoing is a true and correct copy of the log of the #1 DeBusk located in the NW NW SW of Section 19-24S-14W, Stafford County, Kansas

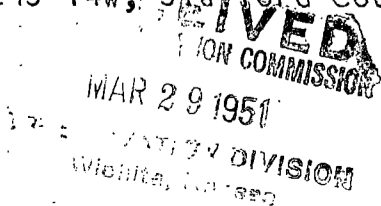

ANSCHUTZ DRILLING COMPANY, INC.

BY: *M. W. Smith*
 M. W. Smith

Subscribed and sworn to before me this 27th day of March, 1951
 My commission expires: Jan. 21, 1954.

Patricia Becker
 Notary Public