


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Stafford County, Sec. 19 Twp. 24E Rge. 14W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
NW NE SE
Lease Owner Roxana Corporation
Lease Name DeBusk Well No. 7
Office Address P. O. Box 1162 Great Bend, Kansas 67530
Character of Well (Completed as Oil, Gas or Dry Hole) _____

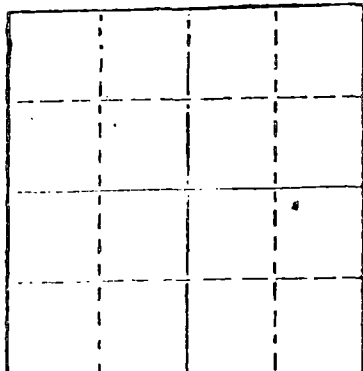

Locate well correctly on above
Section Plat

Dry Hole
Date Well completed 3-16-80 19
Application for plugging filed 3-16-80 19
Application for plugging approved 3-16-80 19
Plugging commenced 3-16-80 19
Plugging completed 3-16-80 19
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. T. Owen
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4420
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

- Mud To 540' 35 Sacks 50-50 Posmix
- Mud To 330' 40 Sacks 50-50 Posmix
- Mud To 40' 10 Sacks 50-50 Posmix
- Mouse Hole 3 Sacks 50-50 Posmix
- Rat Hole 5 Sacks 50-50 Posmix

RECEIVED
STATE CORPORATION COMMISSION

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Merckle Drilling Co, MAR 20 1980 3-20-1980


STATE OF Kansas COUNTY OF Barton Wichita, Kansas, ss.
Clyde Merckle (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Clyde Merckle
P. O. Box 1382 Great Bend, Kansas 67530
(Address)

SUBSCRIBED AND SWORN TO before me this 19th day of March, 1980

Loretta Long
Notary Public.

My commission expires 3-28-80



Roxana Corporation
P. O. Box 1162
Great Bend, Kansas 67530

DeBusk #7

NW NE SE Section 19 Twp 24S Rge 14W

Stafford County

Driller's Log-----Total Depth 4420

0-----110 Sand
110----240 Blue Shale
240----347 Red Bed
347----947 Red Bed
947----970 Anhydrite
970----1600 Shale
1600---2510 Shale & Lime
2510---2870 Shale & Lime
2870---3220 Lime & Shale
3220---3540 Lime & Shale
3540---3835 Lime & Shale
3835---4200 Lime
4200---4420 Lime & Chert

Clyde Merckle

Clyde Merckle