
Form CP-3 Rev. 6-26-62

KANSAS

J. P. Roberts

Assitant Director 500 Insurance Building 212 North Market Wichita 2, Kansas

Well Plugging Authority, issued March 9, 1967.

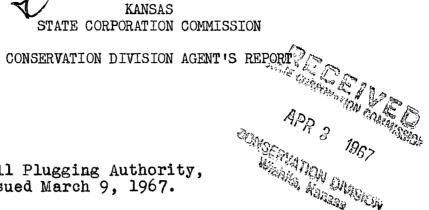

			,		
Operator's	Full Name Spector Pip	e & Supply, Inc	3.		
Complete A	ddress: P. 0. Box 169	, Russell, Kans	as		
Lease Name	Cotton	W	Vell No	# 1	
	nw nw se				
County	Stafford	Total	Depth	43241	
Abandoned (Oil Well X Gas Well	_Input Well	SWD Well	D & A	
Other well	as hereafter indicated:	+ ADMINISTRATION - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 1			
Plugging Co	ontractor: Lynch Casin	g Pulling Compa	any		
Address:	R. R. # 4, Great Bend	, Kansas	Lice	ense No. 457	
Operation (Completed: Hour 1:30PM Da	y 31st Month	March 1	Tear <u>1967</u>	
The Above 1	well was plugged as follows:	:			
291' o	f 8 5/8" surface pipe,	cemented with	300 sacks.	4306' of 5½	"long
string	, cemented with 150 sac	ks. This is an	open hole	. Bottom of	the hole
was sai	nded to 4300°, and ceme	nted with 5 sa	cks, throu	gh the dump	bailer.
2011'	of 5½" long string was	recovered from	the hole.	Bridge plug	was pushed
<u>in flu</u>	id to 280', bridge plug	and rock brid	ge from 28	0' to 260'.	6 sacks
of cem	ent was mixed in a barr	el, and put on	plug at 2	60', through	the dump
of cem	, and let set over-nigh ent was added to the pl O' to 30', and cemented	ug. Hole was f	illed with	1 mud to 40° ,	rock bridge
I hereby c	INVOICED DATE 4/3/69 INV. NO. 4986-W		.gned:	Lie Ele Plugging Super	visod