

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

Stafford County, Sec. 36 Twp. 24S Rge. 14W (E) (W)

Location as "NE/CNW/SW" or footage from lines NE/4 SE/4 SE/4
Lease Owner Dunne-Gardner Drilling Co., Inc.
Lease Name Bowker #2 Well No. 2
Office Address 300 Schweiter Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed January 9 1961
Application for plugging filed January 9 1961
Application for plugging approved January 9 1961
Plugging commenced January 9 1961
Plugging completed January 9 1961
Reason for abandonment of well or producing formation Dry Hole

NORTH

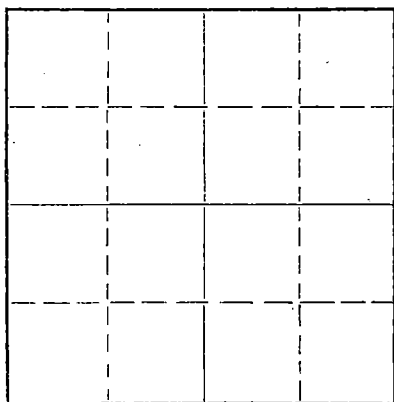

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Frank Broadfoot
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4105 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Pipe		0	308	8 5/8		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill hole with heavy drilling mud to 240', set plug, 1/4 sack hulls on plug and 20 sacks cement. Fill hole with heavy drilling mud to 35', set plug, 1/4 sack hulls to top of plug, and 10 sacks of cement.

STATE OF KANSAS
JAN 13 1961
CONSERVATION DIVISION
Wichita, Kansas

1-13-61

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor _____
Address _____

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Jack D. Dunne (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack Dunne
300 Schweiter Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 12th day of January, 19 61

My commission expires 1-14-64
Doris Nilles Notary Public.



DRILLER'S LOG

COMPANY: Dunne-Gardner Drilling Co., Inc.
 300 Schweiter Building
 Wichita 2, Kansas

LEASE: BOWKER

WELL: No. 2

LOCATION: NE SE SE Section 36-24S-14W,
 Stafford County, Kansas

CONTRACTOR: Dunne-Gardner Drilling Co., Inc.

DATE COMMENCED: December 30, 1960

DATE COMPLETED: January 9, 1961

TOTAL DEPTH: 4105'

CASING: 8-5/8" set @ 316' w/175 sacks cement

<u>FROM</u>	<u>TO</u>	
0	305	Sand
305	855	Red Bed
855	870	Anhydrite
870	1850	Shale and Shells
1850	3520	Lime and Shale
3520	3635	Lime and Shale, Chalky
3635	3750	Lime and Shale
3750	3880	Lime
3880	4045	Lime and Shale
4045	4105	Lime
4105		Total Depth

RECEIVED
STATE CORPORATION COMMISSION

SEP 24 1962


CONSERVATION DIVISION
Wichita, Kansas

I certify the above to be true and correct to the best of my knowledge and belief.

DUNNE-GARDNER DRILLING CO., INC.

By 
Don Gardner

Subscribed and sworn to before me this 21st day of September, 1962.


Marilyn E. Fox, Notary Public

My Commission Expires:

November 9, 1965