


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

WELL PLUGGING RECORD

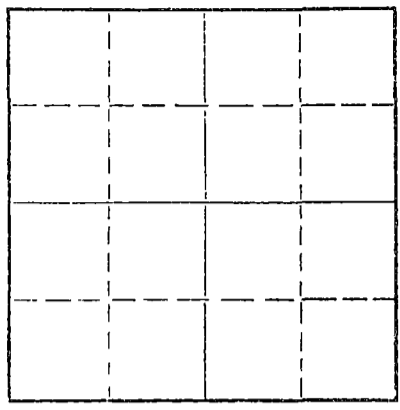

Locate well correctly on above Section Plat

Kingman County, Sec. 25 Twp. 27S Rge. 8W ~~XX~~ ~~XX~~  
Location as "NE/CNW/SW" or footage from lines NW SE SE  
Lease Owner Publisher Petroleum  
Lease Name Funke Well No. 1  
Office Address P.O. Box 25125, Oklahoma City, Okla. 73125  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed April 28, 19 74  
Application for plugging filed Verbal Application 19  
Application for plugging approved Verbal Approval 19  
Plugging commenced April 28, 19 74  
Plugging completed April 28, 19 74  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4,035 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	368'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy rotary mud from 4,035 feet (rotary total depth) to 300 feet. Set plug at 300 feet and cemented with 40 sacks cement. Filled hole with heavy rotary mud from 300 feet to 40 feet. Set solid plug at 40 feet and cemented to cellar with 15 sacks cement, two sacks cement in rathole. Plugging operations accomplished utilizing Halliburton Oilwell Cementing pump truck through 4 1/2 inch drill pipe.

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 3 - 1974  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor H-30, Inc.  
Address 200 North Main, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
Dean Britting, Agent (~~owner~~ of owner) ~~XXXXXX~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting  
200 No. Main, Wichita, Ks. 67202  
(Address)

SUBSCRIBED AND SWORN to before me this 30th day of April, 19 74

My commission expires June 30, 1974  
Elsie Willison  
Notary Public.




COMPANY Publishers Petroleum

SEC. 25 T27S R. 8W  
 LOC. NW SE SE

FARM Funke NO. 1

COUNTY Kingman  
 KANSAS

TOTAL DEPTH 4,035'  
 COMM. April 17, 1974 COMP. April 28, 1974  
 SHOT OR TREATED  
 CONTRACTOR H-30, Inc.  
 ISSUED



CASING  
 20 10  
 15 8 -5/8" 368' cemented w/ 300 sxs cement ELEVATION 1,627 KB  
 12 6  
 13 5

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand	80'
Red Bed	123'
Blue Shale and Shells	371'
Red Bed and Shale	700'
Shale	855'
Shale and Shells	1,293'
Lime and Shale	3,543'
Lime	3,647'
Lime and Shale	4,020'
Chert	4,035'
Rotary Total Depth	4,035'

RECEIVED  
 STATE CORPORATION COMMISSION  
 MAY 3 - 1974  
 CONSERVATION DIVISION  
 Wichita, Kansas

I hereby certify the above and foregoing to be  
 a true and correct log of the above described  
 well as shown by the drilling reports.

H-30, INC.

*Dean Britting*  
 \_\_\_\_\_  
 Dean Britting

State of Kansas }  
 County of Sedgwick } ss:

Subscribed and Sworn to before me a Notary Public in and  
 for said county and state this 30th. day of April, 1974.



*Elsie Willison*  
 \_\_\_\_\_  
 Elsie Willison - Notary Public

Commission Expires:  
 June 30, 1974