

WELL PLUGGING RECORD

STATE OF KANSAS
STATE CORPORATION COMMISSION


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

Kingman County. Sec 16 Twp 27S Rge 8W (E) (W)
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines SW SW NW
Lease Owner Bridgeport Oil Company, Inc.
Lease Name Sutton "B" Well No. 1
Office Address 914 Central Building, Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed April 7 1948
Application for plugging filed April 6 1948
Application for plugging approved April 6 1948
Plugging commenced April 6 1948
Plugging completed April 7 1948
Reason for abandonment of well or producing formation dry

NORTH

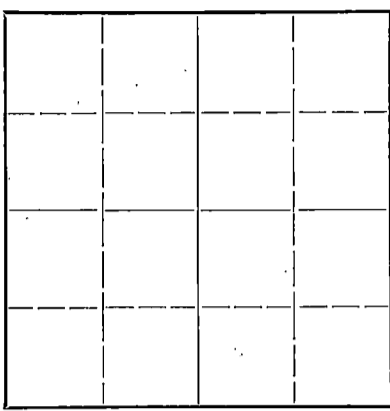

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? yes

Name of Conservation Agent who supervised plugging of this well Greider - Wichita
Producing formation none Depth to top Bottom Total Depth of Well 454.5 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Sand	Water	0	115	8-5/8	245	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud from 454.5 to 280'. Bridge and 15 sacks cement 280 to 243. Heavy mud 243' to 15'. Bridge and 5 sacks cement to base of cellar.

4-12-48
APR 12 1948

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Bridgeport Oil Company, Inc.
Address 914 Central Building, Wichita 2, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
W. B. Hollow (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *W. B. Hollow*

914 Central Building, Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 12th day of April, 1948.

My commission expires April 13, 1949.

Martha Loeff
Notary Public.



BRIDGEPORT OIL COMPANY, INC.
 914 Central Building
 Wichita 2, Kansas

Well Log - - - Button "B" No. 1
 SW SW NW 16-27S-8W
 Kingman County, Kansas

Elevation 1667'
 Date Commenced . March 15, 1948
 Date Completed . April 7, 1948
 Rotary Tools . . 0' to 4543' D.F.

Casing Record:
 8-5/8" casing cemented at
 246' with 200 sacks cement.

<u>LOG</u>		<u>Formation Tops - D.F.</u>	
0	115	Sand	Kansas City 3379
115	135	Shale, shells, red bed	Viola 4314
135	246	Shale, shells	Simpson 4385
246	675	Shale, shells, red bed	Arbuckle 4489
675	1030	Shale, shells	
1030	1085	Salt	
1085	1350	Shale, shells	
1350	1800	Lime	
1800	2725	Shale, shells	
2725	2775	Lime, shale	
2775	2785	Shale, shells	
2785	2925	Lime	
2925	3335	Lime, shale	
3335	3940	Lime	
3940	4011	Lime, shale	
4011	4100	Chert, lime	
4100	4150	Lime	
4150	4322	Shale, lime	
4322	4332	Lime	
4332	4385	Lime, chert	
4385	4390	Lime	
4390	4440	Sand	
4440	4488	Sand, shale	
4488	4493	Shale	
4493	4545	Lime	
4545	Equals 4543 Derrick floor		

I, W.B. Hollow, do hereby certify
 that the above log is correct to the
 best of my knowledge and belief.

BRIDGEPORT OIL COMPANY, INC.

W.B. Hollow

STATE CORPORATION

APR 12 1948

4-12-48

PLUGGING
 FILE SEC 16 T 27 R 8W
 BOOK PAGE 21 LINE 35