


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

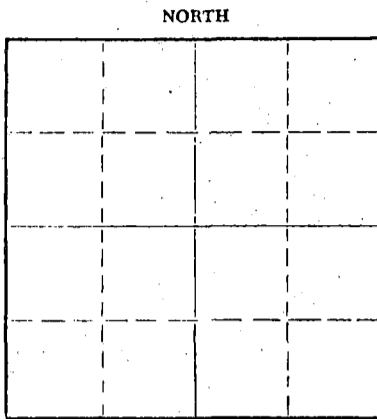

Locate well correctly on above
Section Plat

Stafford County, Sec. 16 Twp. 24 Rge. (E) 14 (W)
Location as "NE/CNW&SW" or footage from lines Approx. SW SW SW
Lease Owner D. R. Lauck Oil Company, Inc.
Lease Name Smith Well No. 9
Office Address 301 So. Broadway Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Salt Water Disposal
Date well completed Oct. 28 19 56
Application for plugging filed July 8 19 70
Application for plugging approved July 13 19 70
Plugging commenced Oct. 19 19 70
Plugging completed Oct. 19 19 70
Reason for abandonment of well or producing formation
Bad Casing
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Russell Beberstein
Producing formation Lower Arbuckle Depth to top 4370 Bottom 4440 Total Depth of Well 4440 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10 3/4	200	None
				7"	4370	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pumped 1 sack Hulls, 15 sacks Jel and 100 sacks cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
OCT 23 1970
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Glenn & Smith Pipe Pulling Company
Address P. O. Box 156 Ellinwood, Kansas 67526

STATE OF Kansas COUNTY OF Barton, ss.
H. E. Wolfe (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *H. E. Wolfe*
P. O. Box 488 Ellinwood, Kansas 67526
(Address)

SUBSCRIBED AND SWORN TO before me this 21 day of October, 19 70

Margaret E. Reusch
Notary Public.

March 6, 1972



D. R. Lauck Oil Company, Inc.
 & Sunray Mid-Continent Oil Company

Smith #9 SWDW

App. SW SW SW
 Sec.16- 24S-14W
 Stafford County Kansas

Commenced: October 10, 1957
 Completed: October 18, 1957

Casing: 200' 10 3/4" cemented w/165 sacks
 4370' 7" cemented w/1000 sacks

Elevation: GR 1972; DF 1975; KB 1978

Drillers Log

Tops
Sample Schlumberger

Clay & shale	45	Heebner	3513-1535
sand	140	Toronto	3535-1557
shale & shells	200	Douglas	3552-1574
shale, shells & red bed	385	Brown Lime	3656-1678 3657-1679
sand & red bed	435	Lansing	3775-1697 3777-1699
red bed & shells	520	Base Kansas City	3940-1962 3940-1962
red bed & shale	910	Viola	4125-2147 4125-2147
Anhydrite	930	Simpson	4235-2257 4234-2256
shale & shells	1540	Arbuckle	4298-2320 4298-2320
lime & shale	1635	Rotary Total Depth	4440-2462 4439-2461
shale & shells	1780		
lime & shale	2955		
lime	2995	SWDW	
Lime & shale	3535		
Lime	3551		
shale	3656		
lime	3965		
Lime & shale	4072		
shale, chert & Lime	4172		
cherty lime	4195		
shale, Lime & chert	4235		
shale	4253		
lime	4440	R.T.D.	

RECEIVED
 STATE CORPORATION COMMISSION
 JUL 13 1970
 CONSERVATION DIVISION
 Wichita, Kansas