


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

NORTH



Locate well correctly on above  
Section Plat

Stafford County, Sec. 16 Twp. 24 Rge. (E) 11 (W)  
Location as "NE/CNW&SW" or footage from lines NE SE SW  
Lease Owner D. R. Lauck Oil Company, Inc.  
Lease Name Smith Well No. 6  
Office Address 301 So. Broadway Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed Oct. 2 19 56  
Application for plugging filed Sept. 22 19 70  
Application for plugging approved Sept. 28 19 70  
Plugging commenced Oct. 7 19 70  
Plugging completed Oct. 16 19 70  
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production Sept. 17 1970  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Russell Beberstein  
Producing formation Arbuckle Depth to top 4291 Bottom 4295 Total Depth of Well 4295 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Lansing	Dry	3680	3945	8 5/8	205	None
Arbuckle	Oil	4291		5 1/2	4293	3192

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sand from 4295 to 4275  
5 sacks cement 4275 to 4245  
Pumped 1 sack Hulls, 15 sacks Jel and 100 sacks  
cement to base of cellar.

RECEIVED  
STATE CORPORATION COMMISSION  
OCT 23 1970  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Glenn & Smith Pipe Pulling Company  
Address P. O. Box 156 Ellinwood, Kansas 67526

STATE OF Kansas, COUNTY OF Barton, ss.  
H. E. Wolfe (employee of owner) or (owner or operator) of the above-described


well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *H. E. Wolfe*  
P. O. Box 188 Ellinwood, Kansas 67526  
(Address)

Subscribed and sworn to before me this 21 day of October, 1970

*Margaret E. Reusch*  
Notary Public.

My commission expires March 6, 1972

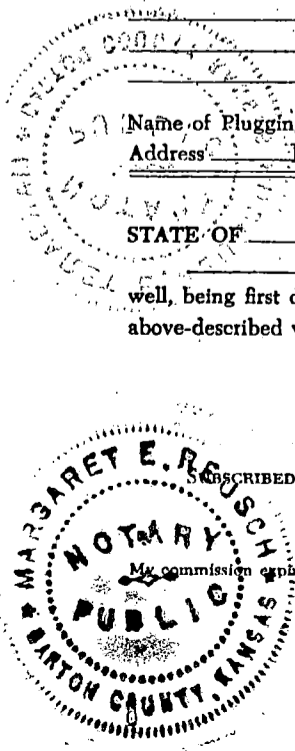

RECEIVED  
STATE CORPORATION COMMISSION

SEP 28 1970

CONSERVATION DIVISION  
Wichita, KansasD. R. Lauck Oil Company, Inc.  
and Sunray Mid-Continent Oil Company

Smith #6

NE SE SW  
Sec. 16-24S-14W  
Stafford County Kans.Commenced: September 15, 1956  
Completed: September 28, 1956Casing Record: 205' 8 5/8" cem.w.165 sx  
4293 5 1/2 cem.w/125 sxElevation: GR 1978; DF 1980; KB 1982;  
Drillers Log

Tops

SampleHalliburton

Sand & shells	162	Heebner	3519-1537	3519-1537
shale & shells	205	Brown Lime	3660-1678	3660-1678
shale & red bed	380	Lansing	3680-1698	3680-1698
sand & red bed	485	Base KansasCity	3943-1961	3943-1961
red bed & shale	915	Conglomerate		4058-2076
Anhydrite	935	Viola	4140-2158	4122-2140
shale & shells	1785	Simpson	4232-2250	4234-2252
lime & shale	2060	Arbuckle	4291-2309	4292-2310
lime	2140	Rotary T.D.	4295-2313	4295-2313
lime & shale	2875			
shale & shells	2905	DST#1 (M-D)	3799-3813, opwn 1 hr; fair	
lime & shale	3385		blow 28 min. and died;	
lime	3460		recov. 30' mud with specks	
lime & shale	3560		oil; all pressures 0#	
shale	3660		in 20 min.	
lime	3943			
lime, chert & shale	3990			
shale & lime	4030			
lime, shale & chert	4185			
chert	4210			
chert, shale & sand	4240			
shale	4291			
Arbuckle	4295			