

15-151-00062-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging of formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

Pratt County. Sec. 18 Twp 27 Rge. (E) 12 (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SW SW NE
Lease Owner R. W. Rine Drilling Company
Lease Name Seidel Well No. 1
Office Address 320 Central Bldg. - Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed February 26, 1949 19
Application for plugging filed March 30, 1949 19
Application for plugging approved April 4, 1949 19
Plugging commenced March 30, 1949 19
Plugging completed March 31, 1949 19
Reason for abandonment of well or producing formation
Dry Hole
If a producing well is abandoned, date of last production None 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

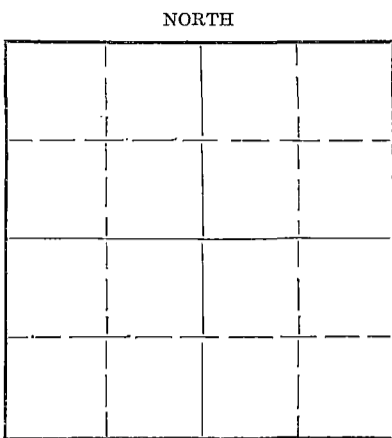

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well C. D. Stough Great Bend, Kansas
Producing formation None Depth to top --- Bottom --- Total Depth of Well 4260' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Surface	Water	0	352	8"	352	None
Oil String	Dry	0	4243	5 $\frac{1}{2}$ "	4243	3310'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 4200 feet to 25' feet for each plug set.

Heavy mud from total depth to 4200', bridged @ 4200' with rock and five sacks cement, heavy mud from bridge @ 4200' to 250', bridged @ 250' with rock and 15 sacks cement, heavy mud from bridge @ 250' to 25', ran 10 sacks cement from 25' to base of cellar.

4-8-49
RECORDED
INDEXED
APR 8 1949
STATE OF KANSAS

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to R. W. Rine Drilling Company
Address 320 Central Building - Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
E. H. Sloyer (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. W. Rine Drilling Company

E. H. Sloyer
(Address)

SUBSCRIBED AND SWORN TO before me this 5th day of April, 19 49

R. M. Green
Notary Public.

My commission expires My commission expires Dec. 29, 1952

PLUGGING
FILE SEC 18 T 27 R 12W
BOOK PAGE 89 LINE 30

Seidel Well No. 1

SW SW NE
Section 18-27S-12W
Pratt County, Kansas

Contractor: The R. W. Rine Drilling Company
Started: 1-31-49 Finished: 2-17-49

Log

Sand	0-	20	
Sand and Red Bed	20-	160	
Red Bed	160-	358	8-5/8" w/ 300 sx. @ 353'
Red Bed and Shale	358-	560	
Sand and Shale	560-	1260	
Shale and Shells	1260-	1770	
Shale and Lime	1770-	2455	
Shale	2455-	2615	
Shale and Lime	2615-	2790	
Shale	2790-	2925	
Lime and Shale	2925-	3080	
Shale and Sand	3080-	3060	
Sandy Lime	3260-	3360	
Lime and Shale	3360-	3730	
Lime	3730-	3970	
Shale	3970-	4035	
Shale and Lime	4035-	4128	
Cherty Lime and Shale	4128-	4144	
Shale	4144-	4158	
Chirt and Lime	4158-	4204	
Shale	4204-	4215	
Core #1	4215-	4225	
Core #2	4225-	4239	
Core #3	4240-	4252	5 1/2" w/ 200 sx. @ 4243

TD 4262'

State of Kansas)
County of Sedgwick) ss

4-8-49

I, E. H. Sloyer, do hereby certify that the above is a true and accurate log of the Seidel Well No. 1 located in the SW/4 of the SW/4 of the NE/4 of Section 18-27S-12W, Pratt County, Kansas.

E. H. Sloyer
Assistant Secretary

Sworn to and subscribed before me this 25th day of February, 1949.

My commission expires Dec. 29, 1952

R. M. Green
Notary Public

PLUGGING
FILE SEC 18 T 27 R 12W
BOOK PAGE 89 LINE 30