


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

STAFFORD County, Sec. 12 Twp. 24 Rge. 15W (E) (W)

Location as "NE/CNW/SW" or footage from lines SE NW NW  
Lease Owner SANTA FE PIPE & SUPPLY  
Lease Name SUITER "C" Well No. 1  
Office Address P. O. BOX 562 - GREAT BEND, KANSAS  
Character of Well (completed as Oil, Gas or Dry Hole) OIL  
Date well completed MARCH 30 19 61  
Application for plugging filed DECEMBER 6 19 62  
Application for plugging approved DECEMBER 7 19 62  
Plugging commenced DECEMBER 8 19 62  
Plugging completed DECEMBER 15 19 62  
Reason for abandonment of well or producing formation DEPLETED

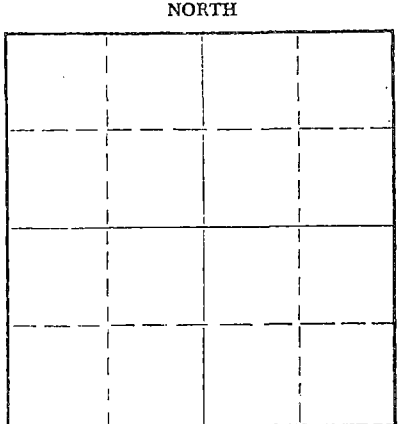

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well HERMAN JUSTUS  
Producing formation Depth to top Bottom Total Depth of Well 4145 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	233'	NONE
				5 1/2	4144'	2210'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

4145' - 4115' - 5 SACKS CEMENT  
 4115' - 230' - MUD  
 230' - 220' - ROCK BRIDGE  
 220' - 160' - 20 SACKS CEMENT  
 160' - 40' - MUD  
 40' - BASE - ROCK AND 10 SACKS CEMENT

RECEIVED  
 STATE CORPORATION COMMISSION  
 JAN 21 1963  
 1-21-63  
 CONSERVATION DIVISION  
 Wichita, Kansas

Name of Plugging Contractor GLENN & SMITH PIPE PULLING COMPANY  
Address P. O. BOX 114 - ELLINWOOD, KANSAS

STATE OF KANSAS, COUNTY OF BARTON, ss.  
T. L. NUTT (employee or owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) T. L. Nutt  
P. O. BOX 562 - GREAT BEND, KANSAS (Address)

SUBSCRIBED AND SWORN TO before me this 16TH day of JANUARY, 1963

My commission expires JULY 31, 1966  
Mary M. Guernsey Notary Public.


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas

WILKINSON DRILLING, INC. &  
Company- HOUSTON PETROLEUM CO.  
Farm- Suiter "C" No. 1

SEC. 12 T. 24 R. 15W  
SE NW NW

Total Depth. 4145'  
Comm. 3-18-61 Comp. 3-30-61  
Shot or Treated.  
Contractor. Wilkinson Drilling, Inc.  
Issued. 8-11-62

County Stafford  
KANSAS



Elevation. 2005' KB

Production. 32 BOPD/ARB

CASING:

8 5/8" @ 233' w/200 sks.  
5" @ 4144'

Figures Indicate Bottom of Formations.

clay & sand	65	TOPS: SCOUT	
shale & shells	236	Hebner	3508
shale red bed	708	Brown Lime	3649
shale & shells	940	Lansing	3660
Anhydrite	988	Viola	4013
shale & shells	1893	Simpson	4030
shale & lime	2115	Arbuckle	4095
lime & shale	3550		
shale	3650		
lime	3888		
shale & lime	4045		
chert	4067		
shale & sand	4094		
Arbuckle Dolomite	4145		
TOTAL DEPTH	4145		

RECEIVED  
STATE CORPORATION COMMISSION

JAN 21 1963

CONSERVATION DIVISION  
Wichita, Kansas