


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

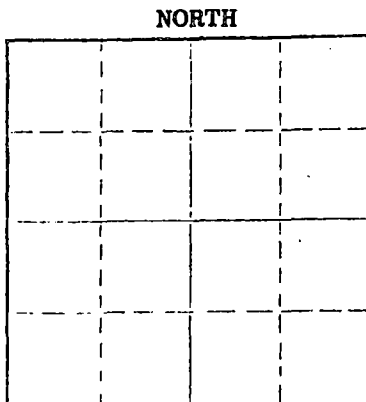

Stafford County, Sec. 28 Twp. 24 Rge. 13 (E) (WX)
Location as "NE/CNW&SWX" or footage from lines NE7NE/NW
Lease Owner Ladd Petroleum Corp.
Lease Name C Toland Well No. 1
Office Address Box 520 Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) Input Well
Date well completed 19____
Application for plugging filed May 5 19 75
Application for plugging approved 19____
Plugging commenced June 19 1975
Plugging completed June 23 19 75
Reason for abandonment of well or producing formation Depleted
If a producing well is abandoned, date of last production 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4600'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10 3/4	346	None
				5 1/2	4250	2441.34'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged bottom back to 3450' with sand and 5 sacks cement. Worked 22 inches tension at 2500 psi or 110,000 lbs. Shot pipe at 3215', 2614', and 2410'. Pulled 74 joints of 5 1/2" casing.

Allied squeezed with 3 sacks hulls, 15 sacks gel, and 150 sacks Pozmix cement.

STATE CORPORATION COMMISSION

JUN 27 1975

Name of Plugging Contractor Rockhold Engineering, Inc.
Address Box 698 Great Bend, Kansas 67530

CONSERVATION DIVISION
Wichita, Kansas

6-27-75

STATE OF Kansas COUNTY OF Barton, ss.
James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James W. Rockhold
(Address) _____

Subscribed and sworn to before me this 26th day of June 19 75

KAREN M. MORTON,
STATE NOTARY PUBLIC
Barton County, Kansas
My Commission Expires
December 1, 1975

My commission expires _____

975

Karen M. Morton
Notary Public.

DRILLER'S LOG

LADD PETROLEUM CORPORATION
 P. O. Box 520
 Great Bend, Kansas 67530

COMPANY:
 CONTRACTOR:
 FARM:
 LOCATION:
 COMMENCED:
 COMPLETED:

LEBEN DRILLING, INC.
 TOLAND "C" #1
 NE $\frac{1}{4}$ NE $\frac{1}{4}$ NW $\frac{1}{4}$ SEC. 28-24S-13W
 STAFFORD COUNTY, KANSAS
 8-15-58
 9-2-58

0	335	Surface Clay & Sand		
335	346	Shale & Sand		
346	700	Sand, Shale & Redbed		
700	800	Sand, Shale & Redbed		
800	825	Anhydrite	TOPS:	
825	1160	Shale & Shells	ANHYDRITE	800
1160	1400	Shale	HEBNER	3451
1400	1800	Lime & Shale	TORONTO	3460
1800	2240	Lime	DOUGLAS	3494
2240	2700	Lime & Shale	BR. LIME	3589
2700	3310	Lime & Shale	KC	3615
3310	3405	Shale/	SIMPSON	4160
3405	3460	Lime		
3460	3610	Lime & Shale	ELEVATION	1933 K.B.
3610	3963	Lime		
3963	3977	Lime & Chert		
3977	4030	Lime, Shale & Chert		
4030	4065	Cherty Lime		
4065	4120	Lime & Chert		
4120	4130	Cherty Lime		
4130	4160	Lime & Chert (Viola)		
4160	4205	Lime & Shale		
4205	4365	Lime		
4365	4600	Lime		
	4600	Rotary Total Depth		

RECEIVED
 STATE CORPORATION COMMISSION
 MAY 8 1975 5-8-75
 CONSERVATION DIVISION
 Wichita, Kansas

Set 346' of 10" surface casing with 275 sacks pozmix & 2 sacks CaCl.

I, Frank Hamlin, do hereby certify that the above and foregoing is a true and correct copy of the log of the Toland "C" #1, located NE $\frac{1}{4}$ NE $\frac{1}{4}$ NW $\frac{1}{4}$ of Section 28, Township 24 South, Range 13 West, Stafford County, Kansas, as reflected by the files of Leben Drilling, Inc.

LEBEN DRILLING, INC.

By: Frank Hamlin
 Frank Hamlin

STATE OF KANSAS }
 COUNTY OF SEDGWICK } SS

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 11th day of September 1958.

Ruth B. Benjamin
 Ruth B. Benjamin, Notary Public

My Commission Expires:
 June 17, 1961.