

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-077-21282-00-01
Spot: W2E2NW Sec/Twnshp/Rge: 16-32S-7W
1320 feet from N Section Line, 1650 feet from W Section Line
Lease Name: ZIMMERMAN Well #: 1
County: HARPER Total Vertical Depth: 4815 feet

Operator License No.: 101
Op Name: KCC FEE FUND PLUG
Address: 266 N MAIN ST, STE 220
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP	5.5	4680		
PROD	5.5	4809	1410	
SURF	8.625	268		

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 03/14/2016 8:00 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: JEFF KLOCK Company: KANSAS CORP COMM Phone: (316) 630-4000

Proposed Plugging Method: AS PER KCC RULES & REGS

Plugging Proposal Received By: STEVE VANGIESON WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 03/14/2016 3:30 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

3-10-16 MU, RU, SET FLOOR, RUN 129 JOINTS TUBING 4000' & SPOTTED 75 SXS COM 3% CACL WITH GAS BLOCK. COMPLETED 2 PM. LAY DOWN TUBING SDFN. 3-14-16 TIH WITH BAILER TAG CEMENT AT 3488'. TOH WITH BAILER. TIH WITH CASING CUTTER & CUT 5 1/2" AT 1410'. TOH WITH CUTTER. PULLED CASING TO 1225' SPOTTED 35 SX COMMON CEMENT. PULL CASING TO 740' SPOTTED 35 SX CEMENT. PULLED CASING TO 340' & CIRCUALTED CEMENT TO SURFACE WITH 125 SX CEMENT. COMPLETED @ 2:15 PM.

Perfs:

Top	Bot	Thru	Comments
3978	4740	CSG	


Remarks: QUALITY WELL SERVICE COMMON CEMENT -- FEE FUND PLUGGING

Plugged through: CSG

Control # 20160021001

District: 02

Signed _____

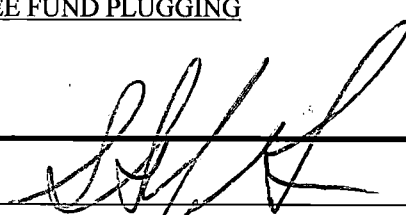

(TECHNICIAN)
KCC WICHITA

MAR 25 2016

RECEIVED

✓