

15-095-30271-001

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Kingman County, Sec. 29 Twp. 27S Rge. 5 XXXX (W)

Location as "NE/CNW/SW" or footage from lines NW NW NW
Lease Owner Wrico Drilling, Inc.
Lease Name Young (original Reeves) Well No. 1
Office Address 6631 East Kellogg, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) OWWO
Date well completed September 24 1966
Application for plugging filed Verbal Authority 1966
Application for plugging approved Verbal Authority 1966
Plugging commenced September 24 1966
Plugging completed September 24 1966
Reason for abandonment of well or producing formation

NORTH

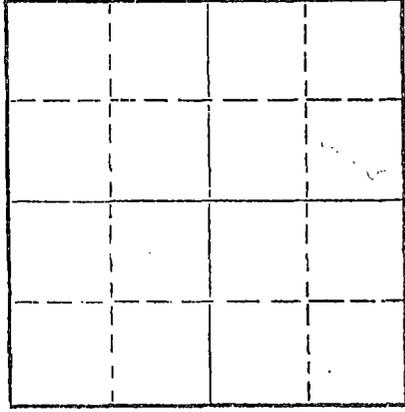

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 1966
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Archie V. Elving
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy rotary mud from rotary total depth 4317 feet to 190 feet. Set bottom plug at 190 feet and cemented with 35 sacks cement and 1/2 sack hulls. Filled hole with heavy rotary mud to 35 feet. Set top plug at 35 feet and cemented with 15 sacks cement and 1/2 sack hulls - 2 sacks cement in rat hole.

Stamp: OCT 24 1966
10-24-66
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor H-30, Inc.
Address 200 North Main Street, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Arlo B. Romer (employee of owner) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Arlo B. Romer
200 North Main Street, Wichita, Kansas

(Address)

SUBSCRIBED AND SWORN to before me this 21st day of October, 1966

Notary Public

My commission expires May 4, 1967

NO. 1 REEVES, NW COR.
 NW/4 29-27S-5W, KINGMAN
 COUNTY, KANSAS.

15-895-302 71-0001

Surface	270	
Shale and Lime Shells	477	
Shale & Shells	768	
Shale & Broken Lime	785	
Broken Lime	890	
Salt	1000	
Lime Shells	1140	
Shale & Lime Shells	1523	
Shale & Lime	1481	
Shale & Shells	1595	
Broken Lime	1575	
Shale	1720	
Broken Lime & Shale	1750	
Shale	1850	
Broken Lime	1860	
Shale	1995	
Lime	2020	
Shale	2070	
Lime	2075	
Broken Lime	2105	
Shale	2230	
Lime	2275	
Shale	2290	
Broken Lime	2400	
Shale	2450	
Lime	2655	
Sandy Lime	2691	
Lime	2716	
Shale	2760	
Lime	2900	
Shale	2980	
Lime	3510	
Sand	3520	
Shale	3608	
	3845	equals 3515
Broken Lime	3650	
Shale	3738	
Chert	3740	
Shale & Chert	3771	
Chert & Lime	3806	
Lime	3848	
	3840	equals 3840
Chert and Lime	3858	
Shale	3868	
Chert & Shale	3892	
Chert & Lime	3905	
Broken Lime & Shale	3912	
Chert & Shale	3928	
Shale	3971	
Chert & Shale	4003	
Shale	4060	
Sandy Shale	4065	
Shale	4107	
Sandy Shale	4102	
Shale	4148	
Dolomite	4161	
Sand & Dolomite	4280	
Dolomite	4317	T. D.
Top Kansas City	2975	
Top Mississippian	3751	
Base Mississippian	4040	
Top Mixer	4103	
Top Viola	4148	
Top Simpson	4161	
Siliceous	4280	
Salt Saturated	4317	
Core D. A.		

PLUGGING
 FILE SEC 29 T 27 R 5W
 BOOK PAGE 56 LINE 45